

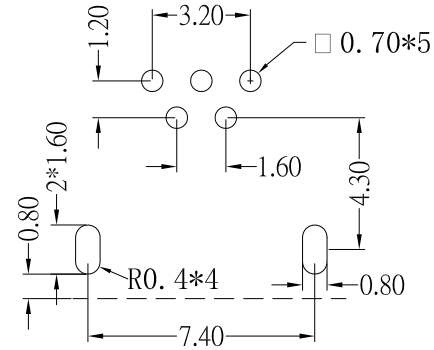
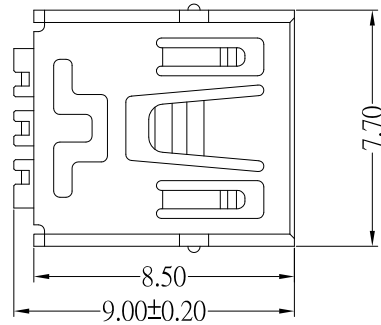
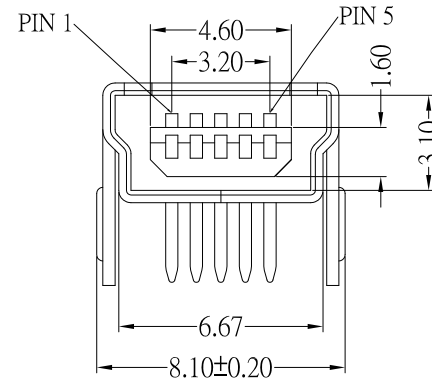


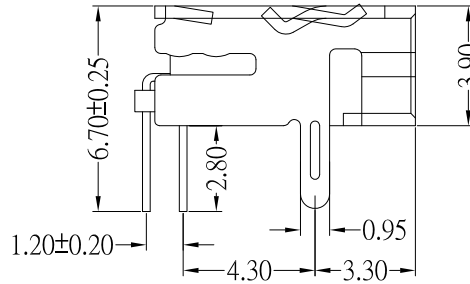

P.C.B LAYOUT MOUNTING PATTERN



SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 mΩ Max
- 4.Dielectric Withstanding Voltage: 300 V AC AT Sec Level
- 5.Insulation Resistance: 100 MΩ Min

Material:

- 1.Housing:LCP , Black
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM				DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR				
5	新增尺寸公差	Jack	101220					Jack Lu	10/12/20	FINISH		MODLE	MINI USB 5BF DIP 兩腳				
4	更新樣式	Jack	032519					CHECKED BY:	DATE		Jacky Chen	10/12/20	SCALE	1 : 1	DWG NO.	MUSB-5B-DM0F-S175	SIZE
3	更新尺寸	Jack	102017					APPROVED BY:	DATE		Tony Kao	10/12/20	SHEET NO.	1 of 1	PART NO.	MUSB-5B-DM0F-S175	VER
2	更新Contact材質及鍍層	Jack	061914									A4					
1	更新鍍層	Jack	102813									R6					
ITEM NO.	DESCRIPTION	DRAWN	DATE														
A	B	C	D	E	F	G	H	I	J								