

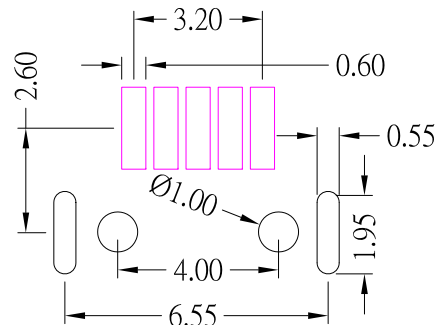
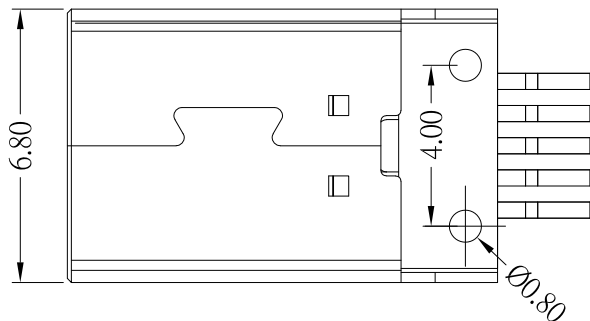
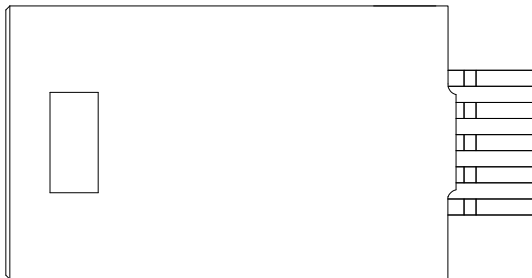


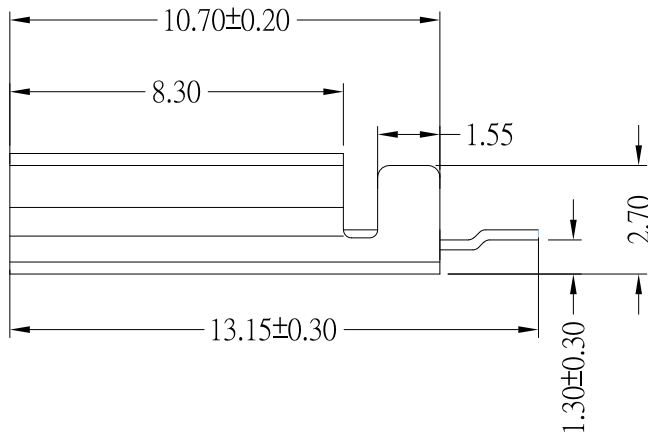

RECOMMENDED P.C.B LAYOUT

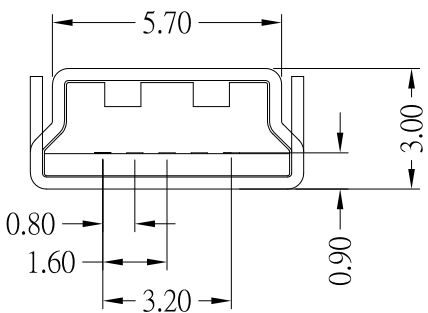

SPECIFICATIONS

Material:

- 1.Housing: LCP
- 2.Contact: Brass
- 3.Shell: Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Electrical Characteristics:

- 1.rating: 30V AC , 1.5 A
- 2.Contact resistance: 30 mΩ Max
- 3.Insulation resistance: 1,000 MΩ Min
- 4.Dielectric withstanding voltage: 500V AC

				DRAWN BY: Jack Lu				DATE: 12/12/24				MAT'L		TITLE		CONNECTOR	
				CHECKED BY: Jacky Chen				DATE: 12/12/24				FINISH		MODLE		MINI USB 5P Male 板端 SMT帶柱	
				APPROVED BY: Tony Kao				DATE: 12/12/24				SCALE		DWG NO.		MUSB-5BPLM1-S236	
												SHEET NO.		PART NO.		MUSB-5BPLM1-S236	
																SIZE	
																A4	
																VER	
																R3	