
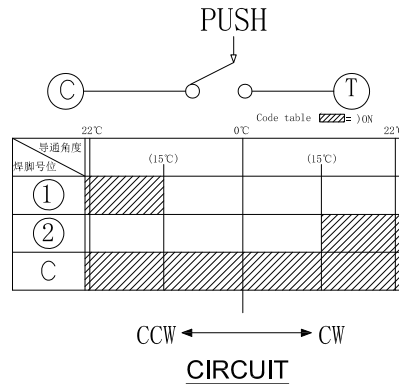
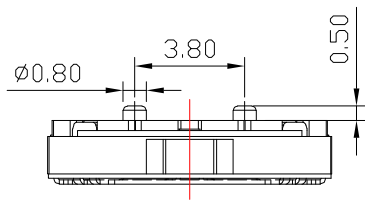
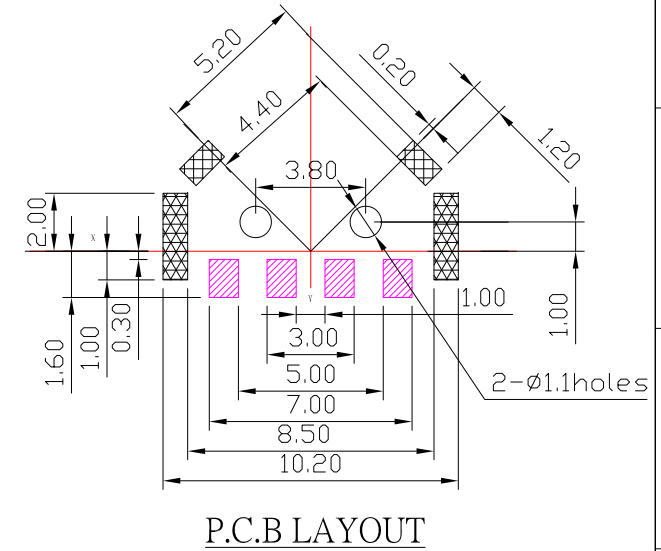
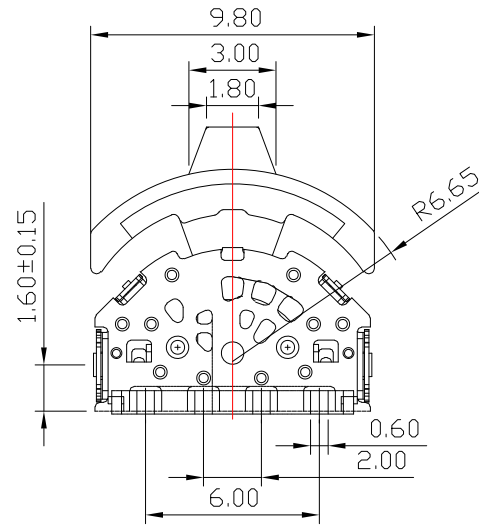
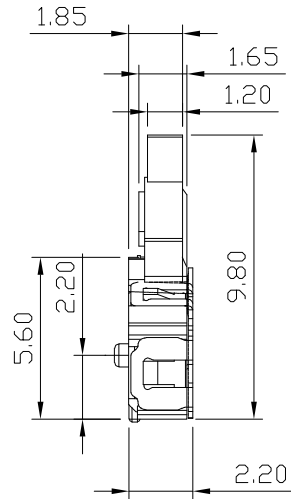


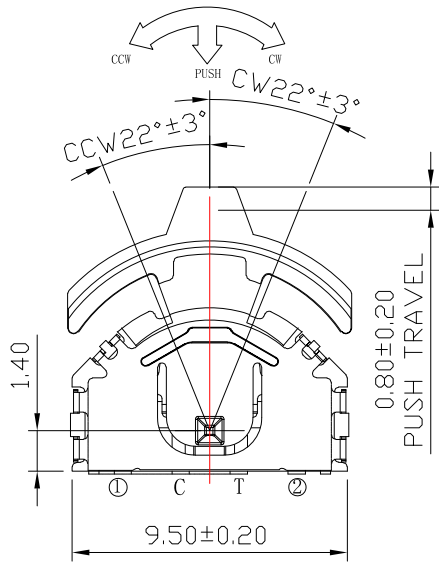

SPECIFICATIONS:

- Operating temperature range: -10°C to $+60^\circ\text{C}$
- Rating: 10mA , 5V DC
- Insulation resistance: $100\text{M}\Omega$ min. 100V DC
- Dielectric strength: 100V AC for 1Min
- Contact resistance: $300\text{m}\Omega$ Max
- Life: $500,000$ Cycles
- Travel: $0.8 \pm 0.20\text{mm}$
- Operating force: $300 \pm 100\text{gf}$, $80 \pm 50\text{gf}$

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/27/25
DATE: 02/27/25
DATE: 02/27/25

MAT'L	FINISH	SCALE	SHEET NO.	TITLE	MODLE	DWG NO.	PART NO.	SIZE	VER
		1 : 1	1 of 1	SWITCH	LEVER PUSH SWITCH	K31-S410	K31-S410	A4	R