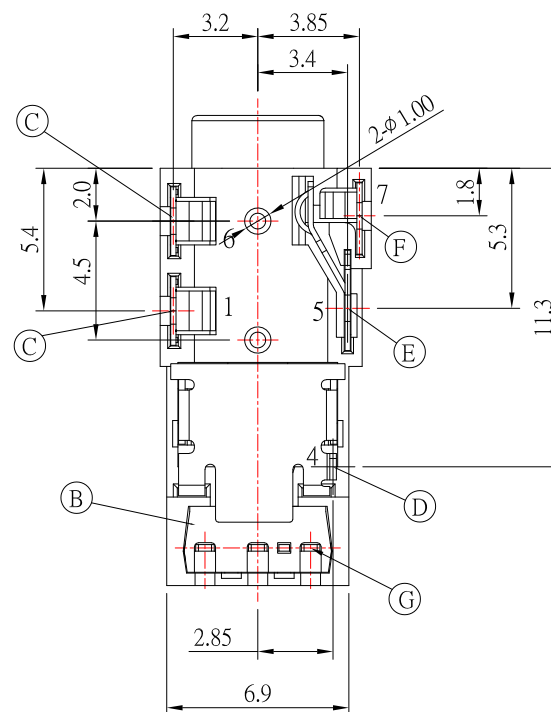
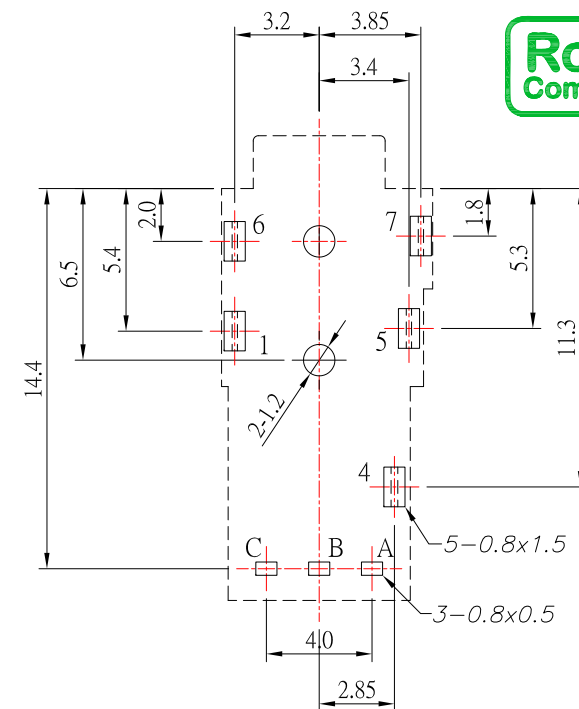




OJ-004A-RX_{xx}-S214

16	16 Mbps
25	25 Mbps

PCB LAYOUT
BOTTOM VIEW

SPECIFICATIONS:

- 1.CONTACT RESISTANCE: 50mΩ MAX
- 2.INSULATION RESISTANCE: 100MΩ MIN
- 3.OPERATING TEMPERATURE RANGE: -25°C TO +85°C.
4. INSERTION FORCE: 3.5kg(Max).
5. EXTRACTION FORCE: 0.4~4.0kg.

Ⓒ	DRIVE IC(TX)			1
Ⓓ	M7	PHOSPHOR BRONZE	Au	1
Ⓔ	M5	PHOSPHOR BRONZE	Au	1
Ⓚ	M4	PHOSPHOR BRONZE	Au	1
Ⓚ	M1&M6	PHOSPHOR BRONZE	Au	2
Ⓔ	COVER	PA10T	BLACK	1
Ⓐ	HOUSING	PA10T	BLACK	1
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ± 0.2 ± 0.3 ± 0.4 ± 0.5 ± 0.3° 3RD. ANGEL'S  UNITS MM					DRAWN BY: DATE		ITEM	DESCRIPTIONS		MATERIAL		FINISH		QTY
									Jack Lu	09/16/25	MAT'L		TITLE	JACK				
									CHECKED BY: DATE		FINISH		MODLE	OPTICAL JACK(接收端)				
									Jacky Chen	09/16/25	SCALE	1 : 1	DWG NO.	OJ-004A-RXxx-S214		SIZE A4		
ITEM NO.	DESCRIPTION	DRAWN	DATE						APPROVED BY: DATE					VER				
									Tony Kao	09/16/25	SHEET NO.	1 of 1	PART NO.	OJ-004A-RXxx-S214	R			