
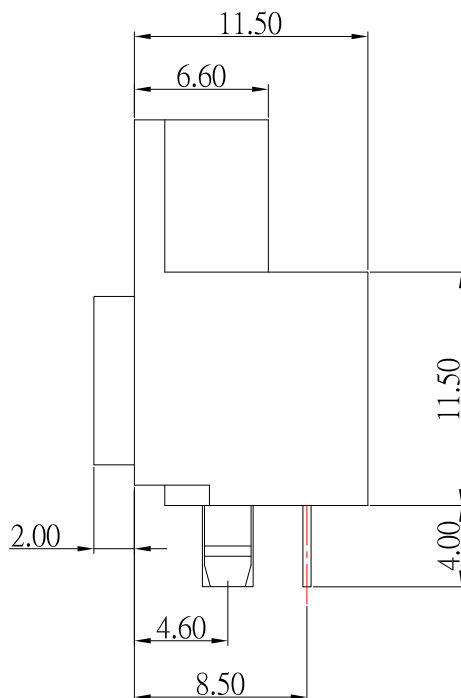
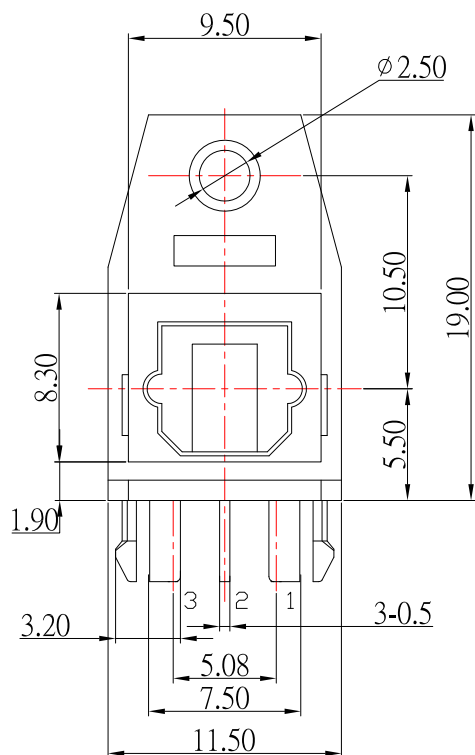


OJ-G5006B-XX3-S214

TX
RX

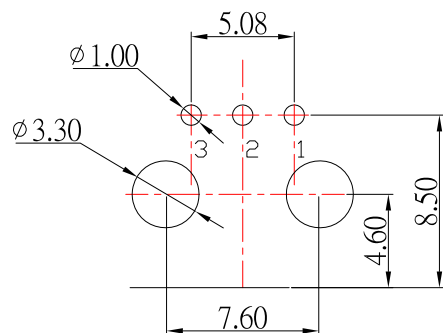

Recommended PCB Layout

SPECIFICATIONS:

- 1.DISSIPATION CURRENT: 5.0 mA
- 2.PPERATING VOLTAGE(Vcc): 2.7-5.5 V
- 3.INSERTION FORCE:4.0Max Kgs
- 4.EXTRACTION FORCE:0.6Kgs TO 4.0 Kgs
- 5.ENDURANCE:500 CYCLES
- 6.OPERATING TEMPERATURE: -25 TO +70 °C

⑥	DRIVE IC(TX UNIT)			1	13 Mbps
⑤	COIL SPRING	SUS		1	
④	GATE	PBT		1	Black
③	FRAME	PBT		1	
②	COVER	PBT		1	
①	HOUSING	PBT		1	
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/25/19	FINISH	MODLE	OPTICAL JACK
CHECKED BY:	DATE	SCALE	DWG NO.	OJ-G5006B-XX3-S214
Jacky Chen	11/25/19	1 : 1	PART NO.	OJ-G5006B-XX3-S214
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	11/25/19			

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增傳輸代碼	Jack	112519
1	更新料號	Jack	070116