



PH-B12-x1xxx-S304

Insulator Material:

0 : PBT

3 : PA6T

PIN數





	L1	L2	L3	L4
A	4.00	2.00	2.80	0.75
B	3.00	2.00	2.00	0.75
C	3.50	2.00	3.00	0.75
D	2.75	2.00	4.00	0.80

Specifications:

- 1.Current Rating : 2.0 A
- 2.Insulator Resistance : 1,000 M Ω Min.
- 3.Contact Resistance : 20 m Ω Min.
- 4.Operating Temperature : -40°C ~ +105°C

Materials:

- 1.Contact : Brass
- 2.Insulator : PBT / PA6T
- 3.Contact Plating : Gold over Nickel

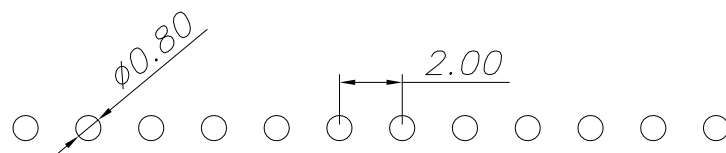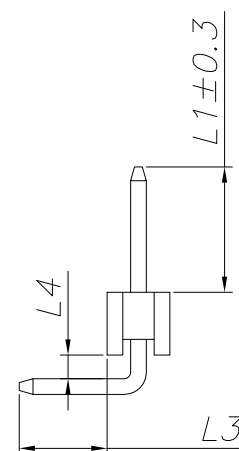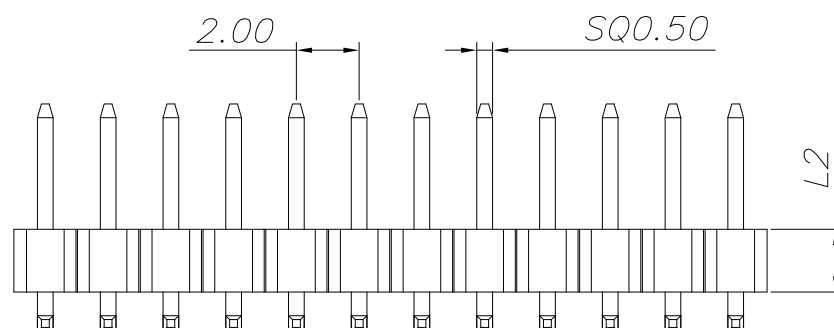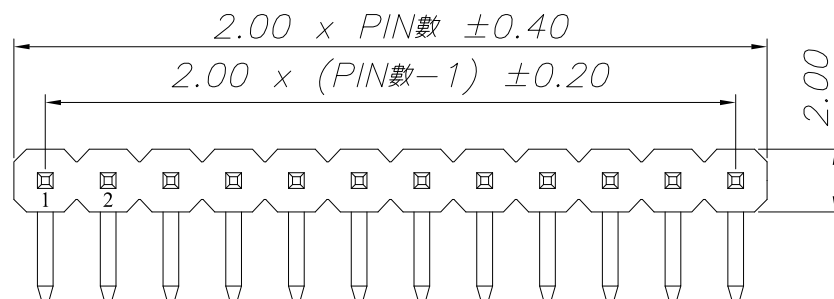

PCB. LAYOUT



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 05/05/21
DATE: 05/05/21
DATE: 05/05/21

MAT'L	TITLE	PIN HEADER
FINISH	MODLE	2.0 PIN HEADER 90度 DIP
SCALE	DWG NO.	PH-B12-x1xxx-S304
SHEET NO.	PART NO.	PH-B12-x1xxx-S304

SIZE
A4
VER
R4

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	新增选项	Jack	050521
3	新增选项	Jack	030821
2	新增选项	Jack	062719
1	更新算式	Jack	101518