



PH-B21-31xxx-S304

PIN數





	L1	L2	L3
A	6.0	4.0	3.0
B	6.0	4.5	3.0
C	2.0	4.5	2.0
D	1.5	4.3	1.5
E	4.0	4.2	2.8
F	4.0	8.2	2.8

Specifications

- 1.Current Rating : 1.5 Amp
- 2.Insulator Resistance : 1000 MΩ Min.
- 3.Contact Resistance : 20 mΩ Max.
- 4.Dielectric Withstanding : AC 500 V
- 5.Operating Temperature : -40℃ ~ +105℃

Materials:

- 1.Contact Material : Phosphor Bronze, Au over Ni
- 2.Insulator Material :PA6T

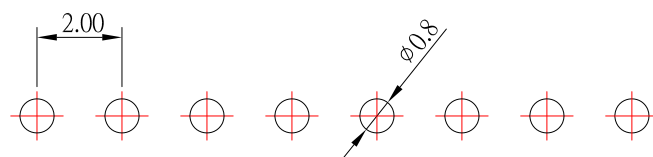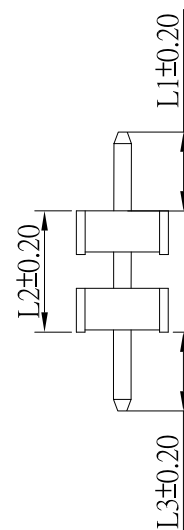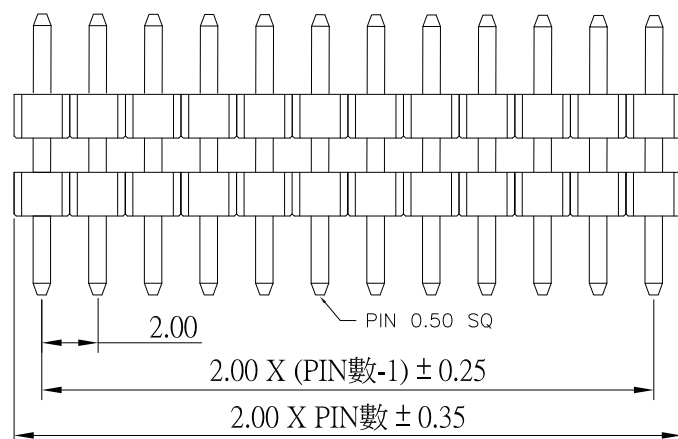

PCB LAYOUT

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED: Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ±0.2 ±0.3 ±0.4 ±0.5 ±0.3 3RD. ANGEL'S  UNITS MM					DRAWN BY: Jack Lu		DATE: 07/18/19		MAT'L		TITLE: Pin Header		
4	新增PIN選項	Jack	071819						CHECKED BY: Jacky Chen		DATE: 07/18/19		FINISH		MODLE: 2.0排針 雙塑單排 180度		
3	新增PIN選項	Jack	060319						APPROVED BY: Tony Kao		DATE: 07/18/19		SCALE: 1 : 1		DWG NO. PH-B21-31xxx-S304		SIZE: A4
2	新增PIN選項	Jack	022317										SHEET NO. 1 of 1		PART NO. PH-B21-31xxx-S304		VER: R4
1	新增PIN選項	Jack	112516														
ITEM NO.		DESCRIPTION		DRAWN	DATE												
A		B		C		D		E		F							