
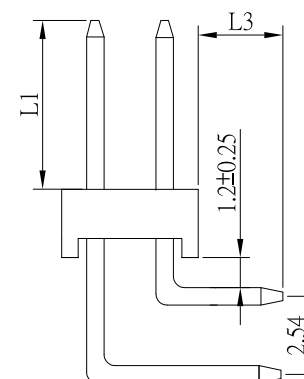


Recommended P.C.B Layout

PH-A12-32xxx-S304
PIN數

	L1	L2	L3
A	6.0	2.54	3.0
B	6.0	1.50	3.0

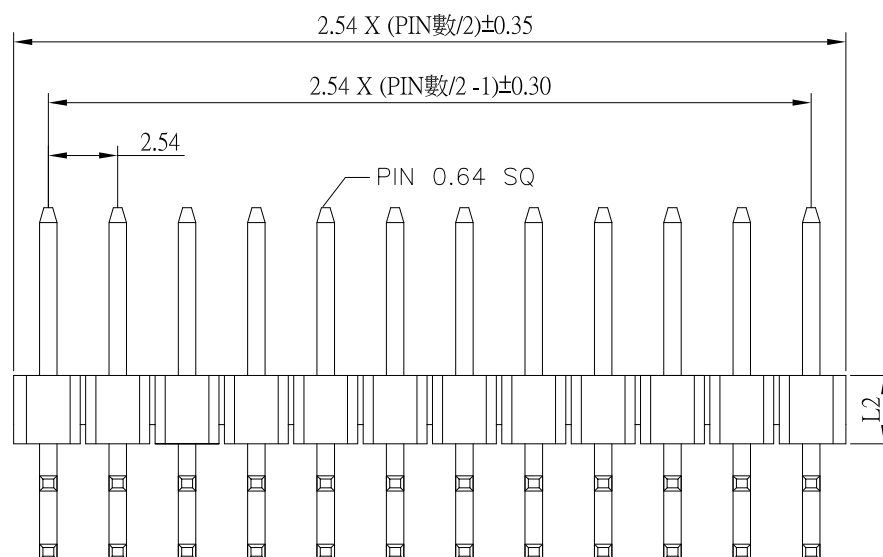

Specifications

Current Rating : 3.0 Amp

Contact Resistance : 20 mΩ Max.

Insulator Resistance : 1000 MΩ Min.

Dielectric Withstanding : AC 1000 V

Operating Temperature : -40°C ~ +105°C

Contact Material : Brass ,Gold Plated

Insulator Material : PA6T,UL 94V-0



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/17/19
DATE: 05/17/19
DATE: 05/17/19

MATL		TITLE	Pin Header
FINISH		MODLE	2.54mm Pin Header H:2.54 90° 2*X PIN數
SCALE	1 : 1	DWG NO.	PH-A12-32xxx-S304
SHEET NO.	1 of 1	PART NO.	PH-A12-32xxx-S304

SIZE
A4
VER
R1