
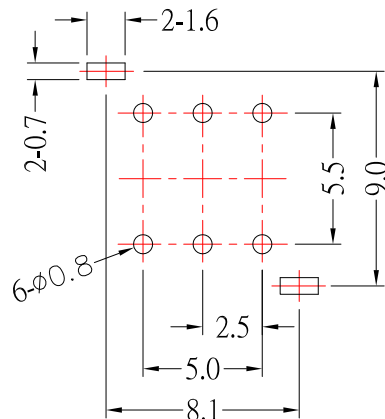
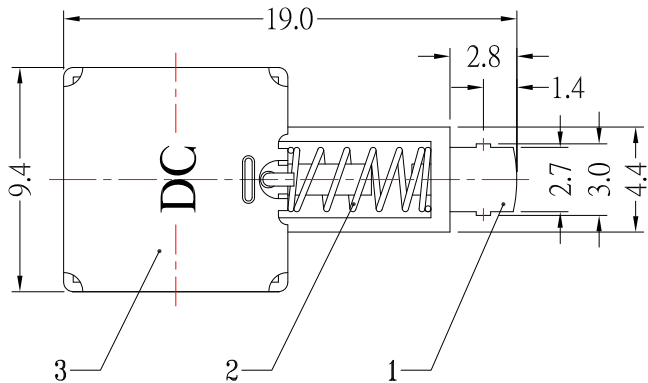
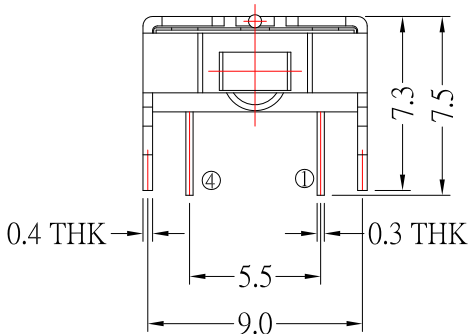


PCB LAYOUT
(BOTTOM VIEW)

SCHEMATIC(NON-SHORTING)

SPECIFICATIONS

- 1.Rating : DC 30V, 0.5A
- 2.Circuit : 2P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 250 ± 100gf
- 5.Life test : 10,000 cycles
- 6.Operating Mode : Self-Lock

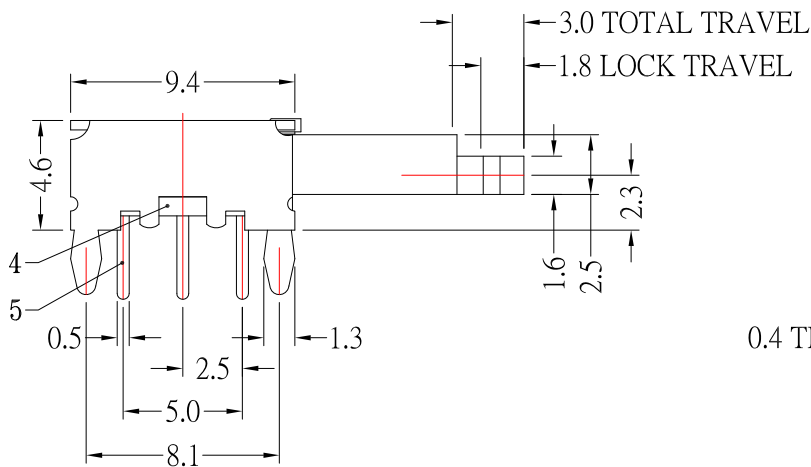

8	CONTACT CLIP	PBS STRIP	2	Ag PLATED
7	CAM STICK	BRASS WIRE	1	NATURAL
6	SPRING PLATE	PBS STRIP	1	NATURAL
5	TERMINAL	BRASS STRIP	6	Ag PLATED
4	BASE	PHENOLIC RESIN	1	NATURAL
3	FRAME	STEEL STRIP	1	Ni PLATED
2	SPRING	STEEL WIRE	1	NATURAL
1	KNOB	POM	1	YELLOW
NO.	PARTS	MATERIALS	Q'TY	FINISH

				CONTACT 建倚科技股份有限公司										
				CONTACT TECHNOLOGY CORP.										
7	4	更新圖面	Jack	060220	TOLERANCE UNLESS OTHERWISE STATED : Up to 5±0.2 Above 5 ~ 15±0.3 Above 15 ~ 30±0.4 Above 30 ~ 50±0.5 Angle±0.3° 3RD. ANGEL'S  UNITS MM									
	3	新增SPEC	Jack	102615										
	2	新增PIN編號	Jack	112614										
	1	新增Operating Mode	Jack	072514										
	ITEM NO.	DESCRIPTION	DRAWN	DATE										

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	06/02/20	FINISH	MODLE	PUSH SWITCH 黃色柄
CHECKED BY:	DATE	SCALE	DWG NO.	PS-22E02-S191
Jacky Chen	06/02/20	1 : 1	PART NO.	PS-22E02-S191
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	06/02/20			