

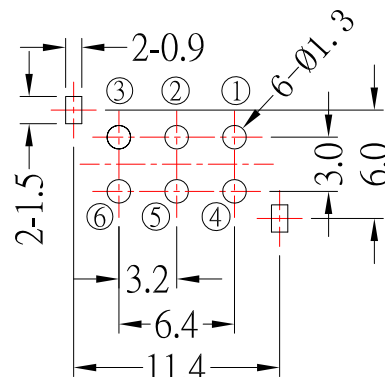
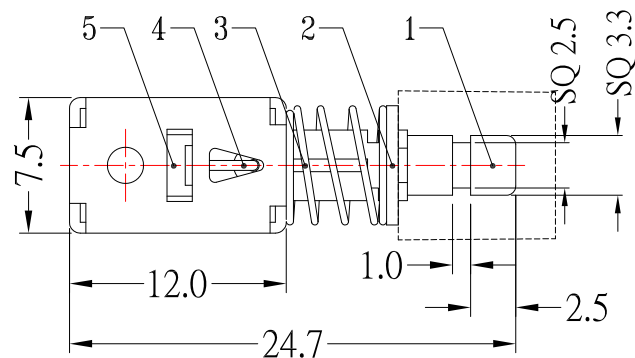


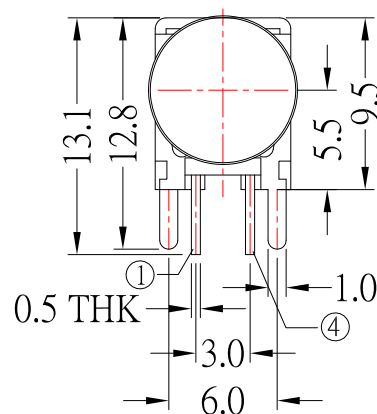

SCHEMATIC (NON-SHORTING)

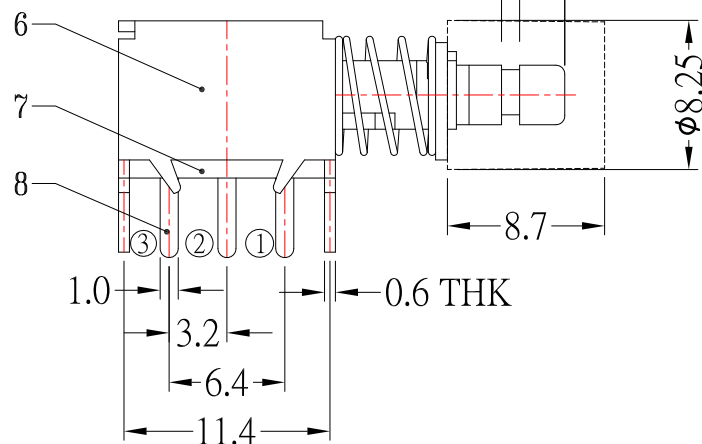

SPECIFICATIONS:

- 1.Rating: DC 12V 3.0A
- 2.Insulation Resistance: 100 M Ω Min/DC 500V
- 3.Function: Non-Shorting
- 4.Contact Resistance: 30 m Ω Max
- 5.Withstand Voltage: AC 500V / 1 Min
- 6.Operating Mode: Self-Lock

9	CONTACT CLIP	PBS	2	Ag PLATED
8	TERMINAL	BRASS	6	Ag PLATED OVER Ni PLATED
7	BASE	PHENOLIC RESIN	1	NATURAL
6	FRAME	SPCC	1	Ni PLATED
5	SPRING PLATE	PBS	1	NATURAL
4	CAM STICK	PBS	1	NATURAL
3	SPRING	STAINLESS STEEL	1	Ni PLATED
2	BLOCK	STAINLESS STEEL	1	Ni PLATED
1	KNOB	PA66	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

				 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.					
4	新增SCHEMATIC中PIN編號	Jack	033015						
3	新增PIN編號	Jack	032515						
2	新增Operating Mode	Jack	072814						
1	新增PCB LAYOUT尺寸	Jack	051414	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ~ 15 ± 0.2 Above 5 ~ 30 ± 0.3 Above 15 ~ 40 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°					
ITEM NO.	DESCRIPTION	DRAWN	DATE	3RD. ANGEL'S  UNITS MM					

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	03/30/15					
CHECKED BY:	DATE	FINISH		MODLE	PUSH SWITCH	
Jacky Chen	03/30/15					
		SCALE	1 : 1	DWG NO.	PS-22F433+C102-K	SIZE
APPROVED BY:	DATE					A4
Tony Kao	03/30/15	SHEET NO.	1 of 1	PART NO.	PS-22F433+C102-K	VER
						R4