



CIRCUIT

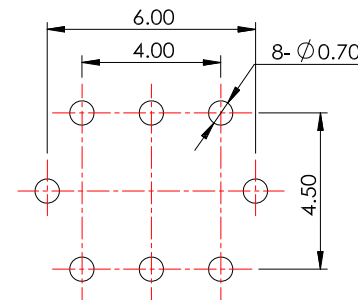

P.C.B LAYOUT MOUNTING PATTERN

PS-6041N-xx-S088

COLOR OF LED




0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

COLOR OF LED

0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		

SPECIFICATIONS:

- 1.RATING : 0.1A , 30VDC
- 2.CONTACT RESISTANCE : 100 mΩ Max
- 3.INSULATION RESISTANCE : 100 MΩ min
- 4.DIELETRIC STRENGTH : 250 V AC / 1 MIN
- 5.OPERATING TEMPERTURE : -16°C to 60°C
- 6.OPERATING FORCE : 180 ± 500 gf
7. LIFE : 10,000 cycles .
- 8.Timing: Non-Shorting
- 9.Operation: Non-Lock TYPE

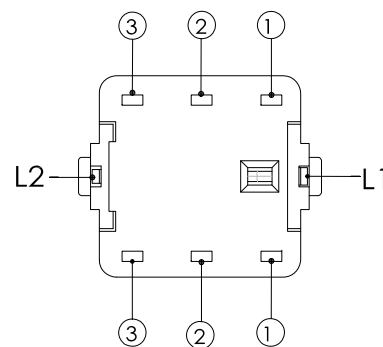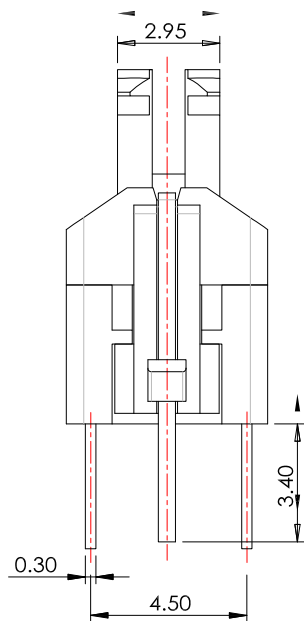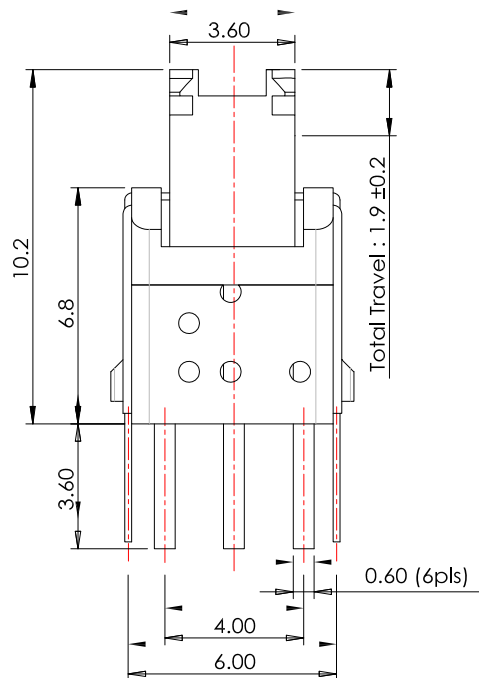

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 02/24/17
DATE: 02/24/17
DATE: 02/24/17

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
Push switch Non-Lock Type
PS-6041N-xx-S088
PS-6041N-xx-S088

SIZE
VER

A4
R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新料號	Jack	022417