





CIRCUIT DIAGRAM



SCHEMATIC (NON-SHORTING)

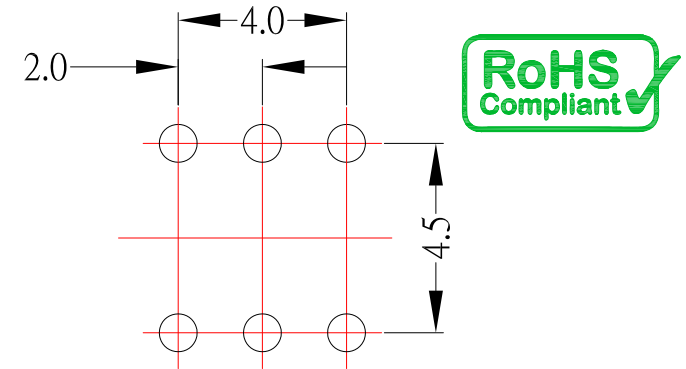

P.C.B LAYOUT MOUNTING PATTERN

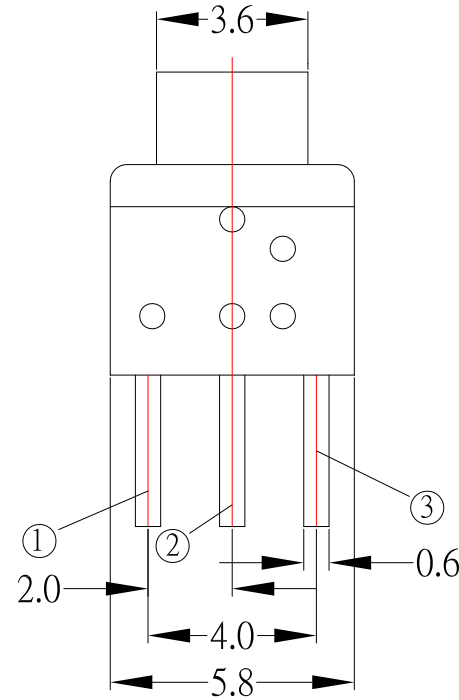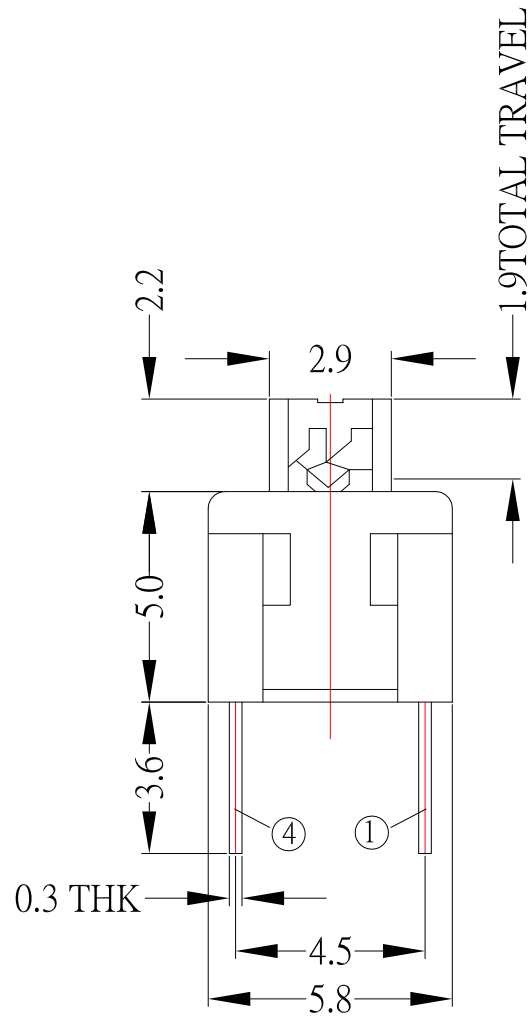

SPECIFICATIONS

Rating	30V DC / 0.1A
Circuit	2C-2P
Contact Resistance	200 mΩ MAX .
Timing	NON-SHORTING
Operating Mode	SELF-LOCK : PS-D16FL-S191 NON-LOCK : PS-D16FN-S191
Stroke	Full : 1.9mm , Lock : 1.0mm
Operating Force	SELF-LOCK :150 gf ±80 NON-LOCK 250 gf ±80
Operating Life	10,000 CYCLES

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 01/06/15
DATE: 01/06/15
DATE: 01/06/15

MAT'L		TITLE	SWITCH
FINISH		MODLE	PUSH SWITCH
SCALE	1 : 1	DWG NO.	PS-D16Fx-S191
SHEET NO.	1 of 1	PART NO.	PS-D16Fx-S191
		SIZE	A4
		VER	R1