

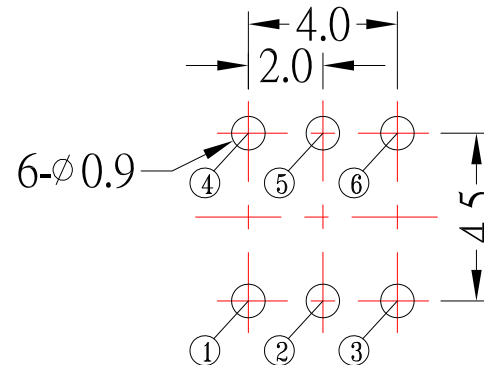
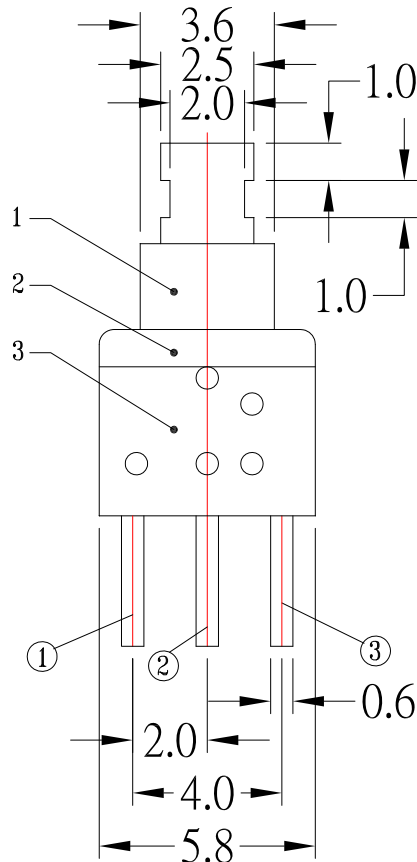


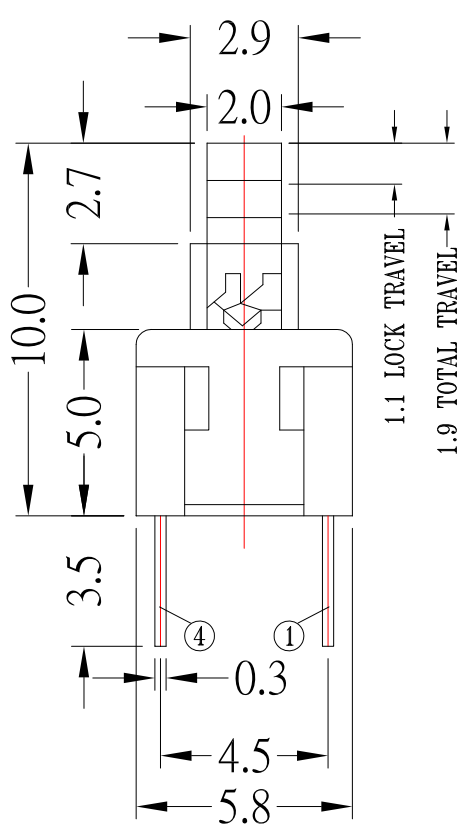

P.C.B LAYOUT
BOTTOM VIEW

SPECIFICATIONS:

- 1.RATING: 12V DC / 0.2A
- 2.CIRCUIT: 2C-2P
- 3.TIMING: NON-SHORTING
- 4.OPERATING MODE: SELF-LOCK : PS-D16L-S191(KNOB:White)
Non-LOCK : PS-D16NL-S191(KNOB:GREY)
- 5.OPERATING FORCE: 250±100 gf
- 6.OPERATING LIFE:10,000 Cycles

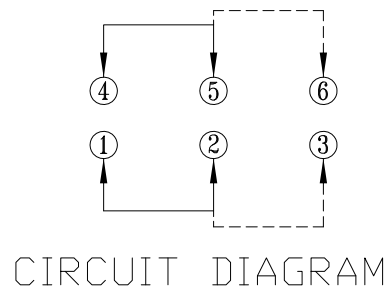

7	SPRING	SUS	1	NATURAL
6	CAM STICK	SUS	1	NATURAL
5	TERMINAL	BRASS	6	Ag PLATED
4	CASE	PPA	1	GREY
3	COVER	PA66	1	BLACK
2	CONTACT	PHOSPHOR BRONZE	2	Ag PLATED
1	KNOB	PBT	1	WHITE / GREY
NO.	PARTS	MATERIALS	Q'TY	FINISH

6	新增OPERATING LIFE	Jack	030623
5	更新圖面	Jack	102220
4	新增PCB LAYOUT尺寸	Jack	080918
3	依KNOB顏色區分代表SELF-LOCK or Non-LOCK	Jack	051616
2	新增材質	Jack	032514
1	更新圖面及SPEC	Jack	021914
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司		CONTACT TECHNOLOGY CORP.	
TOLERANCE UNLESS OTHERWISE STATED :		3RD. ANGEL'S	UNITS MM
Up to 5	±0.2		
Above 5 ~ 15	±0.3		
Above 15 ~ 30	±0.4		
Above 30 ~ 50	±0.5		
Angle	±0.3°		

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/06/23			
CHECKED BY:	DATE	FINISH	MODLE	PUSH SWITCH
Jacky Chen	03/06/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PS-D16x-S191
Tony Kao	03/06/23	1 : 1		
		SHEET NO.	PART NO.	PS-D16x-S191
		1 of 1		
				SIZE A4
				VER R6