




PS-x-613x-S313

COLOR OF LED

0	Without	1	Red
2	Green	3	Orange
4	Yellow	7	Blue
8	White		


L: SELF-LOCK
N: NON-LOCK

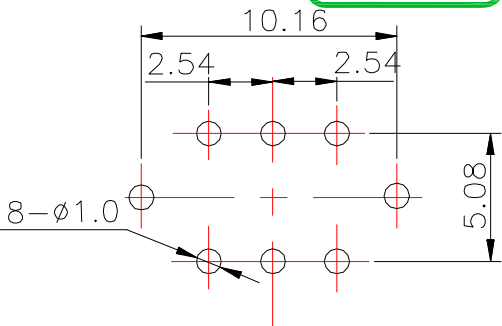

P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 30V, 0.1A Max ; DC 5V, 0.1mA Min
Insulation Resistance	100MΩ Min.
Contact Resistance	70mΩ Max.
Operating Force	300±100gf
Operating Life (cycles)	100,000
Operating Temperature	-20° C ~ +70° C



CIRCUIT DIAGRAM

7	LED	1		
6	KNOB	1	POM	White
5	COVER	1	NYLON66	Black
4	CONTACT	2	PHOSPHOR BRONZE	Ag plated
3	SPRING	1	STEEL	Natural
2	CASE	1	NYLON66	Black
1	TERMINAL	2	BRASS	Ag Plated over Ni
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/15/24
DATE: 05/15/24
DATE: 05/15/24

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: PUSH SWITCH WITH LED
DWG NO.: PS-x-613x-S313
PART NO.: PS-x-613x-S313

SIZE: A4
VER: R

ITEM NO.

DESCRIPTION

DRAWN

DATE