

PCB LAYOUT MOUNTING PATTERN

NOTE :

- 1.Housing: PA6T,Black
- 2.Contact: Phosphor Bronze
- 3.Stator: Copper Alloy
- 4.Contact Plating : Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 5.Stator : Nickel under Plated surface layer

Electrical:

- 1.Voltage Rating : 125VAC
- 2.Current Rating : 1.5 A Max
- 3.Insulation Resistance : 1000 M Ω MIN
- 4.Dielectric Strength : 1000 VAC
- 5.Contact Resistance : 20 m Ω MAX


Environmental:

- 1.Operating Temperature : -40 $^{\circ}$ C ~ +85 $^{\circ}$ C

RJ45-4183M051-x-S118

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

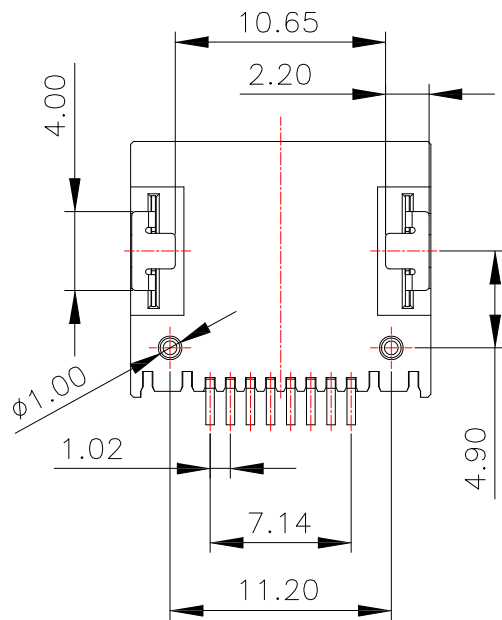

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	02/06/18
CHECKED BY:	DATE
Jacky Chen	02/06/18
APPROVED BY:	DATE
Tony Kao	02/06/18

MAT'L		TITLE	RJ45
FINISH		MODLE	RJ45
SCALE	1 : 1	DWG NO.	RJ45-4183M051-x-S118
SHEET NO.	1 of 1	PART NO.	RJ45-4183M051-x-S118
		SIZE	A4
		VER	R1

1	新增pcb layout尺寸	Jack	020618
ITEM NO.	DESCRIPTION	DRAWN	DATE