


PCB LAYOUT MOUNTING PATTERN

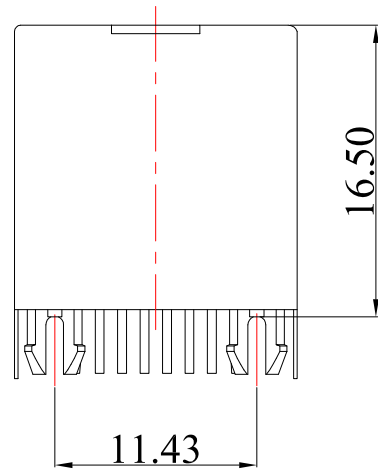

RJ45-52E811E-x-S307

鍍層厚度 :

Blank	: 1u"
1	: 3u"
2	: 15u"
3	: 30u"
5	: 6u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC

Mechanical:

- 1.Housing : PBT,Black
- 2.Insert : PBT,Black
- 3.Contact : Phosphor Bronze , Gold Plating over Nickel
- 4.Shield : Brass, Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 08/04/21
DATE: 08/04/21
DATE: 08/04/21

MAT'L		TITLE	RJ45
FINISH		MODLE	RJ45
SCALE	1 : 1	DWG NO.	RJ45-52E811E-x-S307
SHEET NO.	1 of 1	PART NO.	RJ45-52E811E-x-S307

SIZE	A4
VER	R

ITEM NO.	DESCRIPTION	DRAWN	DATE