
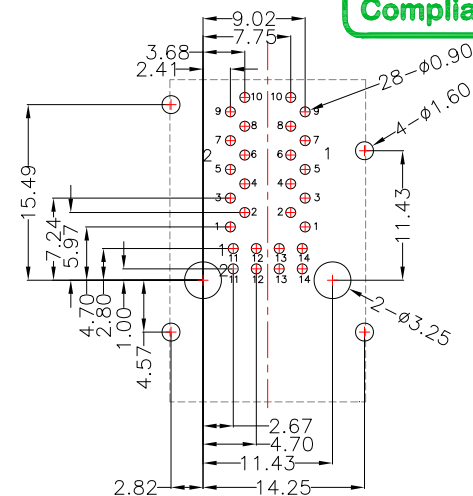
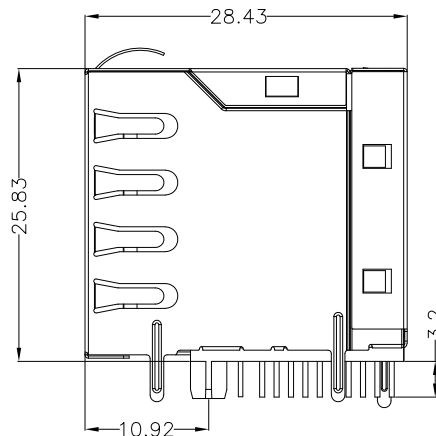


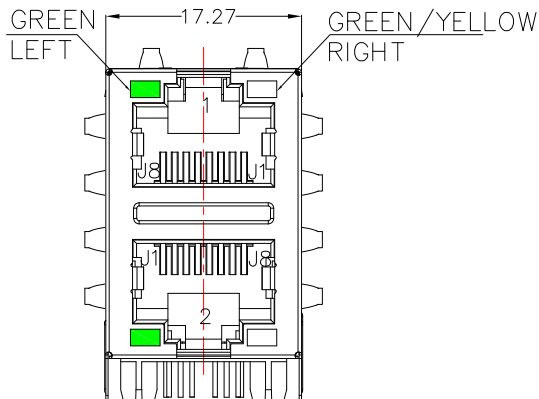

PCB LAYOUT

LED Specification



Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565nm	20mA	2.2-2.4V
Yellow	590nm	20mA	2.1-2.5V

Material:


- 1.Housing : PA66,Black
- 2.Contact : Phosphor Brzonze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated
- 4.Terminal Bracket : PBT,Black

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

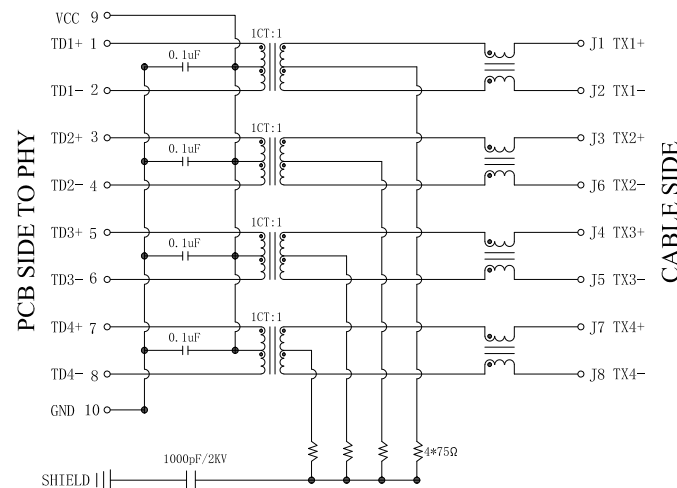

SCHEMATIC

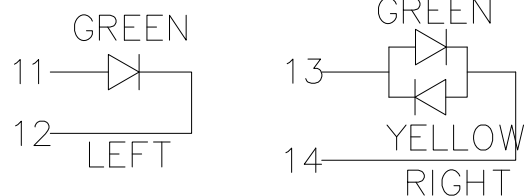

					CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: Jack Lu	DATE 02/11/25	MAT'L		TITLE	RJ45	
						CHECKED BY: Jacky Chen	DATE 02/11/25	FINISH		MODLE	RJ45 2X1 1000BASE WITH LED	
						APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	MJ45-21Q04D-GGY-S473	SIZE A4
ITEM NO.	DESCRIPTION	DRAWN	DATE				Tony Kao	02/11/25	SHEET NO.	1 of 1	PART NO.	MJ45-21Q04D-GGY-S473