


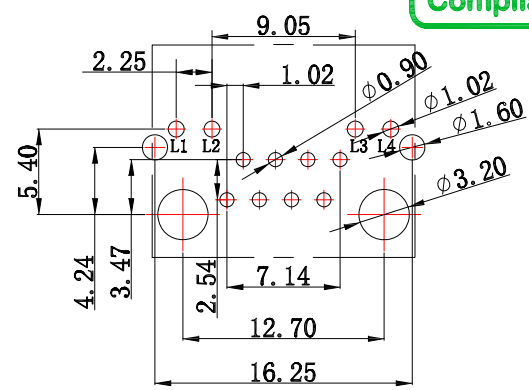
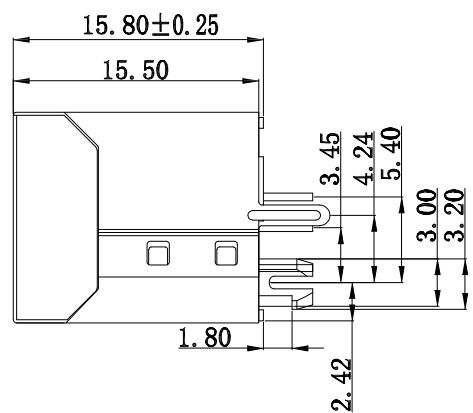


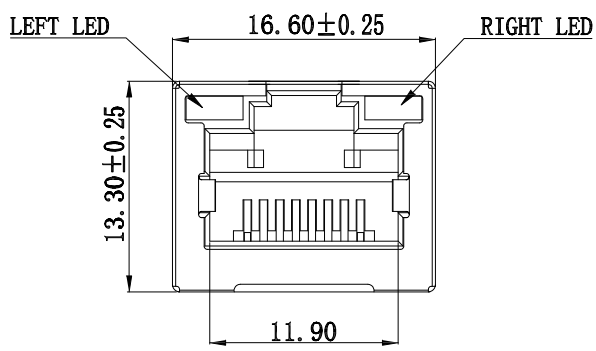

PCB LAYOUT
TOP VIEW

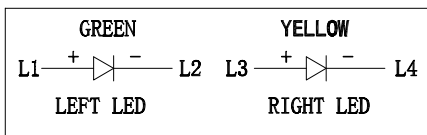

RJ45-52T811EGYx-S307

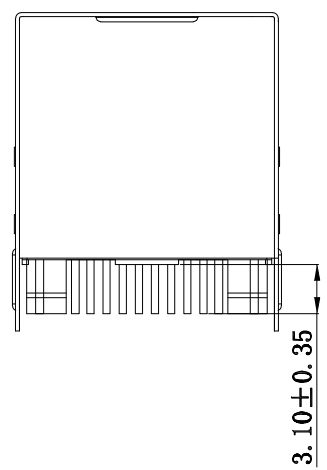

鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN
- 5.Dielectric Strength : 1000V AC OR 1500V DC RMS AT 0.5mA

Material:

- 1.Housing : PBT,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Insert : PBT,Black
- 4.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ±0.2 ±0.3 ±0.4 ±0.5 ±0.3 3RD. ANGEL'S  UNITS MM	DRAWN BY:	DATE	MAT'L		TITLE	RJ45			
						CHECKED BY:	DATE	FINISH		MODLE	RJ45 8P8C屏蔽無邊 WITH LED		
						Jacky Chen	08/20/25						
						APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	RJ45-52T811EGYx-S307		SIZE
ITEM NO.	DESCRIPTION	DRAWN	DATE		Tony Kao	08/20/25	SHEET NO.	1 of 1	PART NO.	RJ45-52T811EGYx-S307		A4	
												VER	
												R	