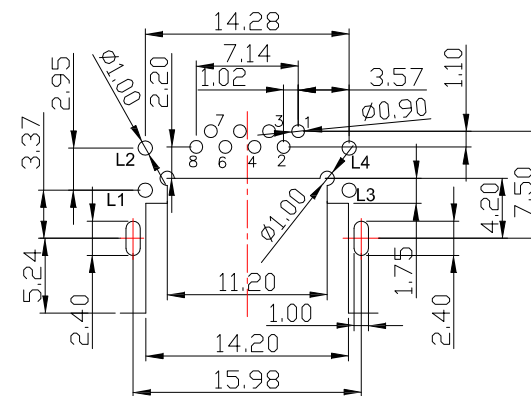
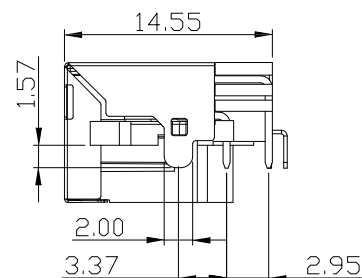
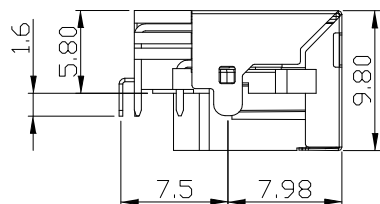
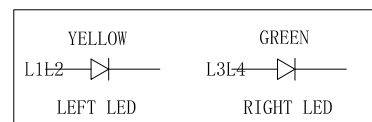


[illegible]

- 鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN
- 5.Dielectric Strength : 1,000 VAC

MATERIAL:

- 1.Housing : LCP,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
2.Storage Temperature : -40°C ~ +85°C

					CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.				DRAWN BY: DATE		MAT'L		TITLE	RJ45		
									CHECKED BY: DATE		FINISH			MODLE	RJ45 8P8C 沉板式H5.8 左黃右綠	
									Jacky Chen 03/31/26		SCALE		1 : 1	DWG NO.	RJ45-58K811-YGx-S307	SIZE A4
									APPROVED BY: DATE		SHEET NO.		1 of 1	PART NO.	RJ45-58K811-YGx-S307	VER R
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°		3RD. ANGEL'S		UNITS	MM							