

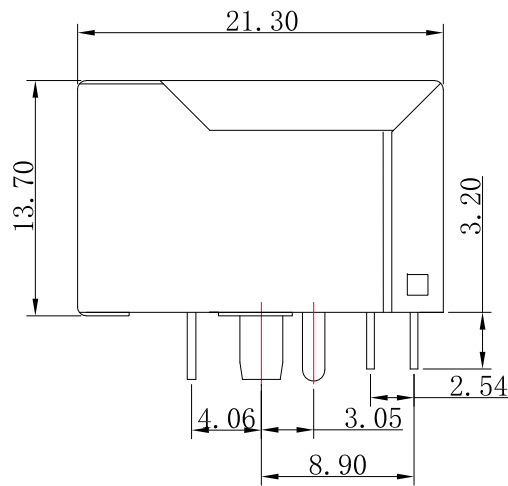
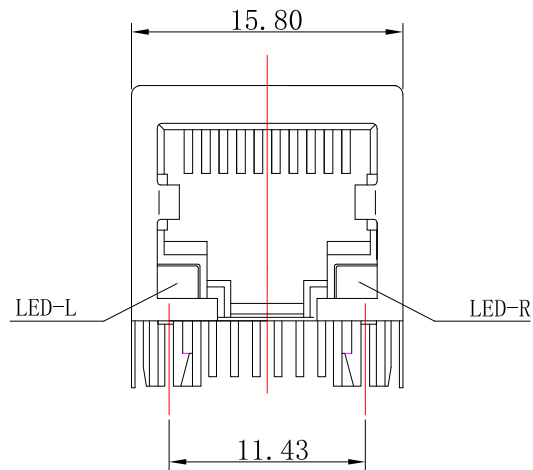


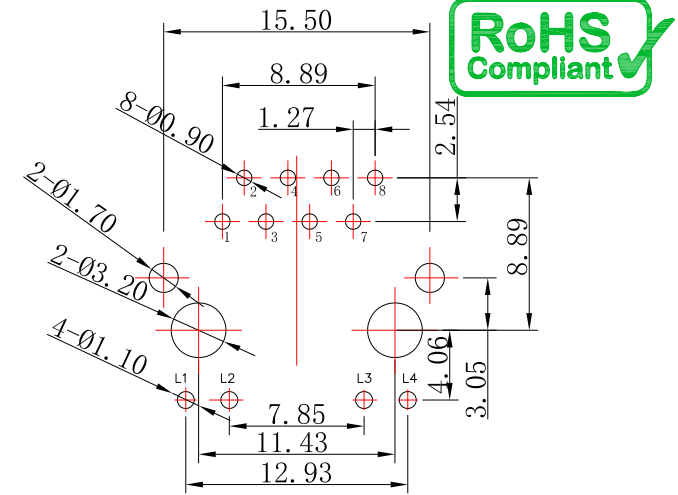

RJ45-59A811-YGx-S307

鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

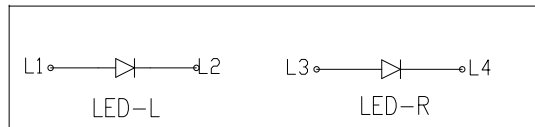

PCB LAYOUT

SPECIFICATIONS:

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 30 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN
- 5.Dielectric Strength : AC 1000 V

Material:

- 1.Housing : PA46 ,Black
- 2.Insert : PA46 ,Black
- 3.Contact : Phosphor Bronze , Gold Plated over Nickel
- 4.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C

ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.					
TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM

DRAWN BY:	DATE	MAT'L	TITLE	RJ45
Jack Lu	10/22/25	FINISH	MODLE	RJ45 8P8C 1x1 屏蔽 左黄右绿
CHECKED BY:	DATE	SCALE	DWG NO.	RJ45-59A811-YGx-S307
Jacky Chen	10/22/25	1 : 1	PART NO.	RJ45-59A811-YGx-S307
APPROVED BY:	DATE	SHEET NO.	1 of 1	VER
Tony Kao	10/22/25			R