

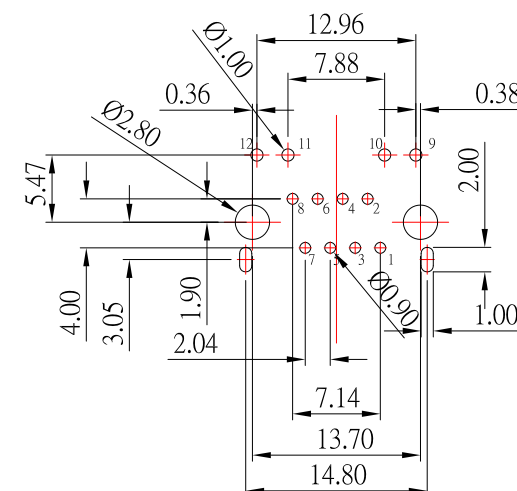

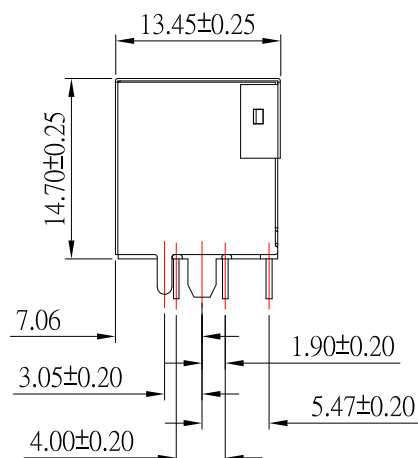


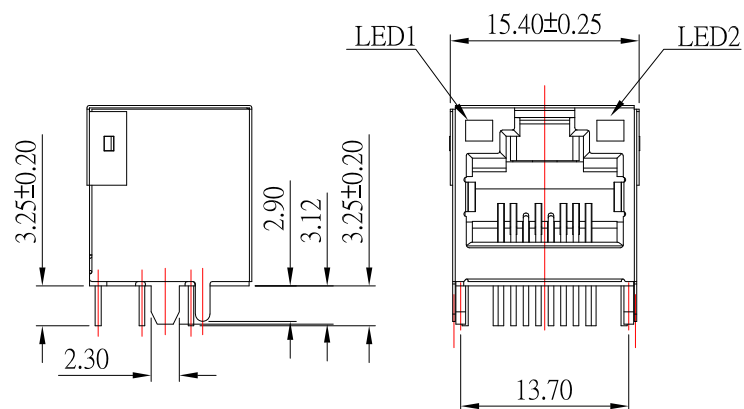

PCB LAYOUT



RJ45-6371x-GY-S492

— 鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"
6 : 50u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 20 m Ω MAX
- 4.Insulation Resistance : 1000 M Ω MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC RMS 60 HZ 1 MIN

Material:

- 1.Housing : PA9T,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
2.Storage Temperatureg : -40°C ~ +85°C

				CONTACT 建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3° 3RD. ANGEL'S  UNITS MM	DRAWN BY: DATE		MAT'L		TITLE	RJ45		
					Jack Lu	08/22/25	FINISH		MODLE	RJ45 Cat.6 SIDE ENTRY PCB <u>FTP 8P</u> W/I LED		
					CHECKED BY: DATE							
					Jacky Chen	08/22/25	SCALE	1 : 1	DWG NO.	RJ45-6371x-GY-S492	SIZE A4	
ITEM NO.	DESCRIPTION	DRAWN	DATE				APPROVED BY: DATE				VER	
						Tony Kao	08/22/25	SHEET NO.	1 of 1	PART NO.	RJ45-6371x-GY-S492	R