


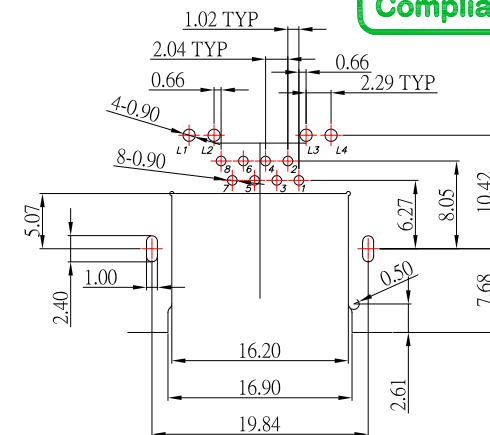
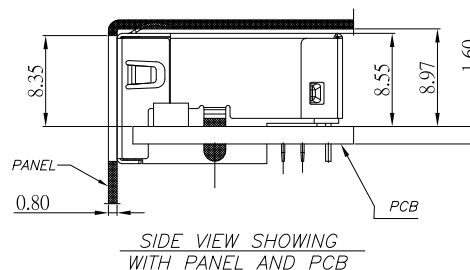


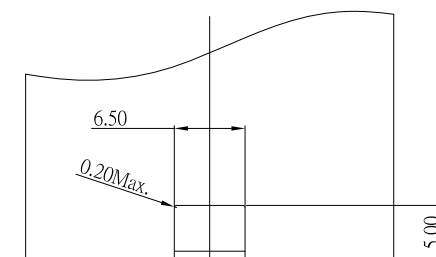



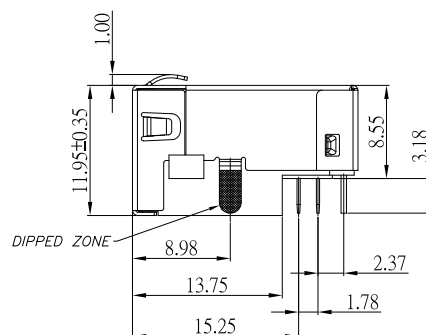

PCB LAYOUT



TOP VIEW

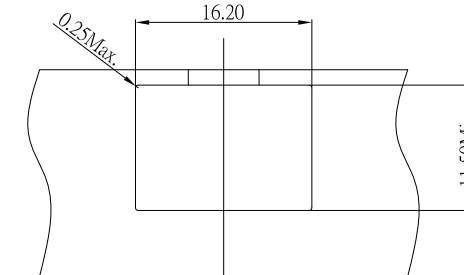

FRONT VIEW
RECOMMEND PANEL LAYOUT

SPECIFICATIONS

Electrical:

- Voltage Rating : 125V AC
- Current Rating : 1.25 A
- Insulation Resistance : 500 MΩ MIN.
- Dielectric Strength : 1000V AC

MATERIAL

- Housing : LCP,Black
- Contact : Phosphor Bronze , Gold Plating over Nickel
- Shield : SUS , Tin Plated

Environmental:

- Operation Temperature : -40°C ~ +85°C
- Storage Temperature : -40°C ~ +85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 03/06/26
CHECKED BY: Jacky Chen
DATE: 03/06/26
APPROVED BY: Tony Kao
DATE: 03/06/26

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: RJ45
MODLE: RJ45 CAT6A 8P8C 1X1 WITH LED
DWG NO.: RJ45-KK370A-GY-S492
PART NO.: RJ45-KK370A-GY-S492

SIZE: A4
VER: R

ITEM NO. DESCRIPTION DRAWN DATE