


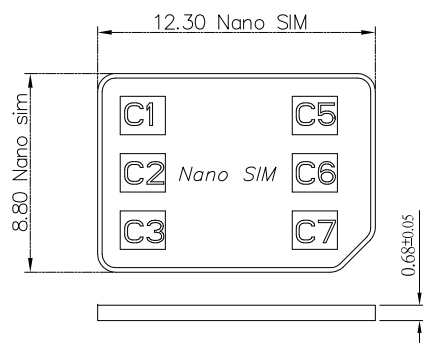
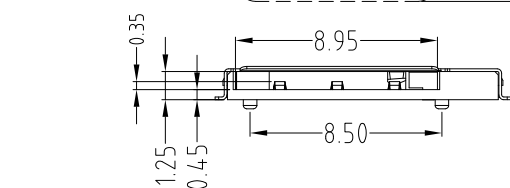
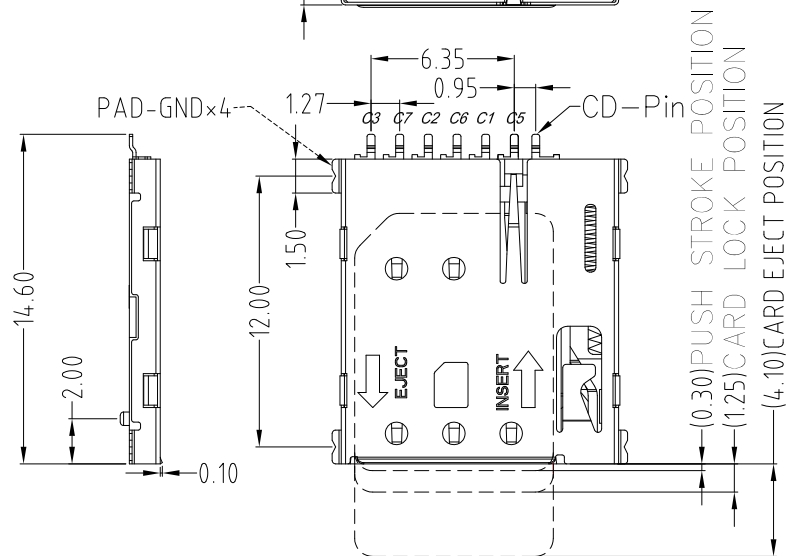
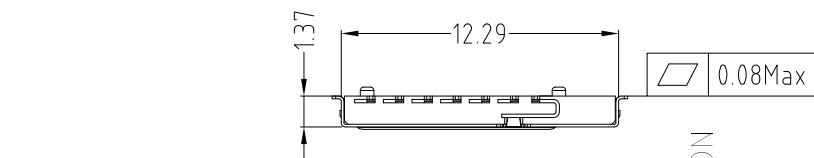


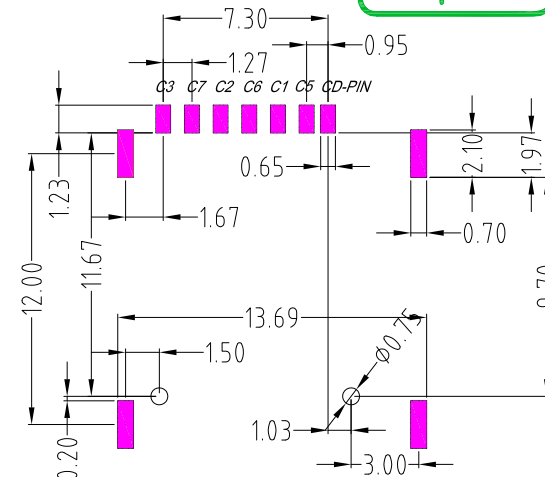

SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

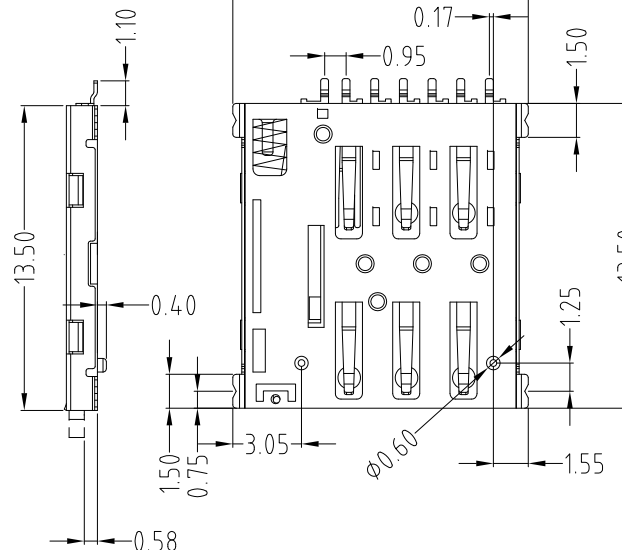

PCB LAYOYT

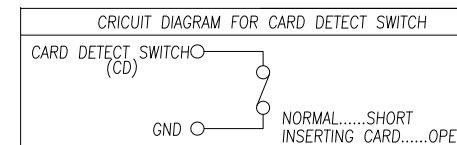

SPECIFICATION

Electrical :

- 1.Current Rating: 0.5mA AC/DC
- 2.Voltage Rating: 125V AC/DC
- 3.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1000 MΩ Min.

Environmental:

- 1.Operating Temperature: -20°C ~ +70°C.
- 2.Storage Temperature: -40°C ~ +70°C.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: Stainless Steel

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

ITEM NO	DESCRIPTION	DRAWN	DATE
4	更新Operating Temperature	Jack	030524
3	更新Contact材質	Jack	111522
2	更新料號	Jack	081822
1	更新料號	Jack	050522

CONTACT 建倚科技股份有限公司		CONTACT TECHNOLOGY CORP.	
TOLERANCE UNLESS OTHERWISE STATED :		3RD. ANGEL'S	UNITS MM
Up to 5	±0.2		
Above 5 ~ 15	±0.3		
Above 15 ~ 30	±0.4		
Above 30 ~ 50	±0.5		
Angle	±0.3°		

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	03/05/24			
CHECKED BY:	DATE	FINISH	MODLE	NANO SIM PUSH 1.37H 帶CD PIN
Jacky Chen	03/05/24			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	03/05/24	1 : 1	NSIM-510010632S-S267	A4
		SHEET NO.	PART NO.	VER
		1 of 1	NSIM-510010632S-S267	R4