


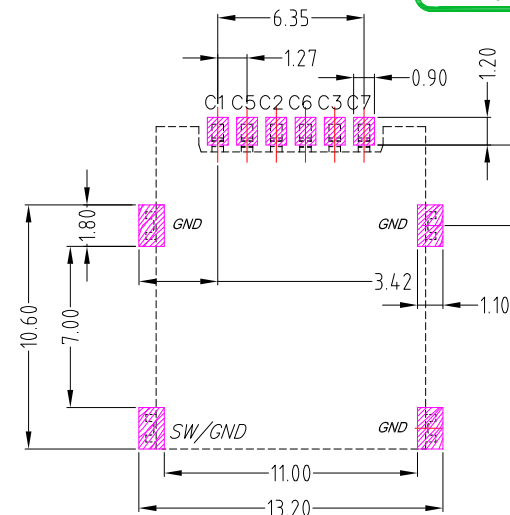
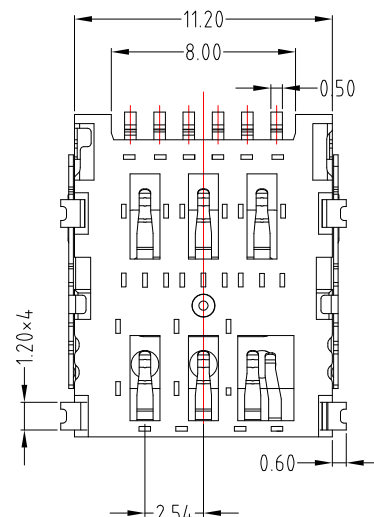
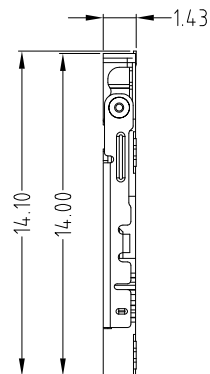


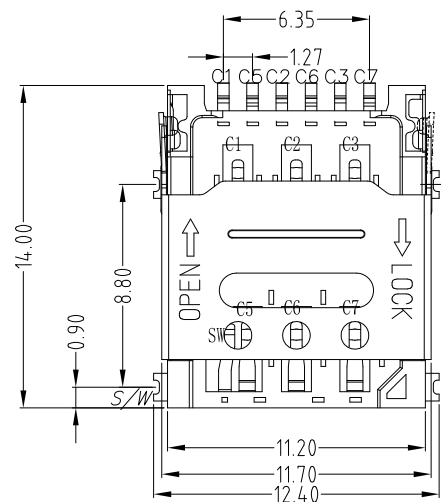


Technical drawing of a 1:20 scale model of a train car. The drawing shows a side profile of the car with dimensions: 1.40m total height, 0.40m base height, 0.60m window height, and 0.80m total height including roof. A box on the right contains a trapezoid symbol and the text "0.10MAX".

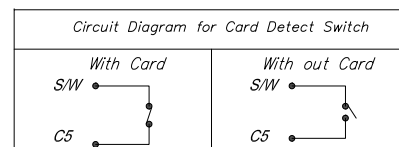


PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	SWTSH PIN



STEP 1 INSERT NANO SIM CARD



STEP 2 PUSH THE SHELL



STEP 3 FINISH

SPECIFICATION:

1. CURRENT RATING : 0.5 mA AC / DC MAX.
2. VOLTAGE RATING : 5V AC / DC
3. INSULATION RESISTANCE : 100MΩ MIN.
4. CONTACT RESISTANCE : 80mΩ MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.
6. STORAGE TEMPERATURE : -40°C TO +85°C.
7. LIFE : 5000 CYCLES

MATERIALS:

1. HOUSING : LCP
2. CONTACT : PHOSPHOR BRONZE
3. SHELL : SUS

Finish:

1. Finish: CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
2. SHELL: NICKEL UNDER PLATED SURFACE LAYER

7	6	更新樣式	Jack	032024
	5	更新樣式	Jack	022924
	4	新增平整度標示	Jack	072723
	3	新增pin編號	Jack	091322
	2	更新料號	Jack	070522
	1	更新OPERATING TEMPERATURE	Jack	080621
ITEM NO		DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	03/20/2018
CHECKED BY:	DATE
Jacky Chen	03/20/2018
APPROVED BY:	DATE
Tony Kao	03/20/2018

DATE _____

03/20/2

DATE _____

03/20/2

DATE _____

MAT'L
FINISH
SCALE
SHEET NO

TITLE	CONNECTOR
-------	-----------

MODLE

[illegible]

DWG NO	
--------	--

CONNECTOR	
Nano SIM CARD 掀蓋 1.40H 7P 帶開關	
NSIM-SFB007R-S267	
NSIM-SFB007R-S267	

	SI
--	----

A small diagram showing a point A in the first quadrant of a Cartesian coordinate system. The point is labeled 'A' and is located in the upper right area of the first quadrant.

V
F