
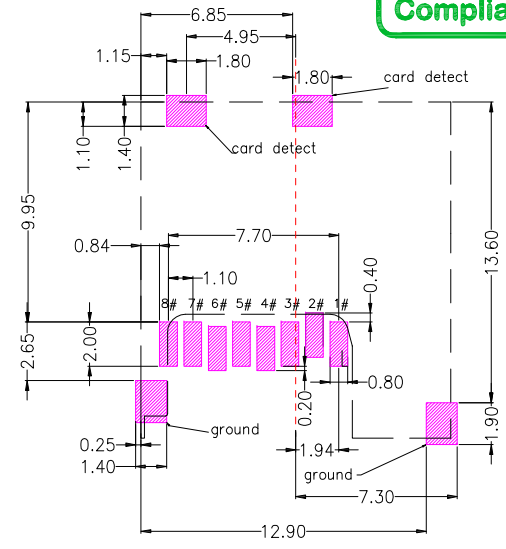
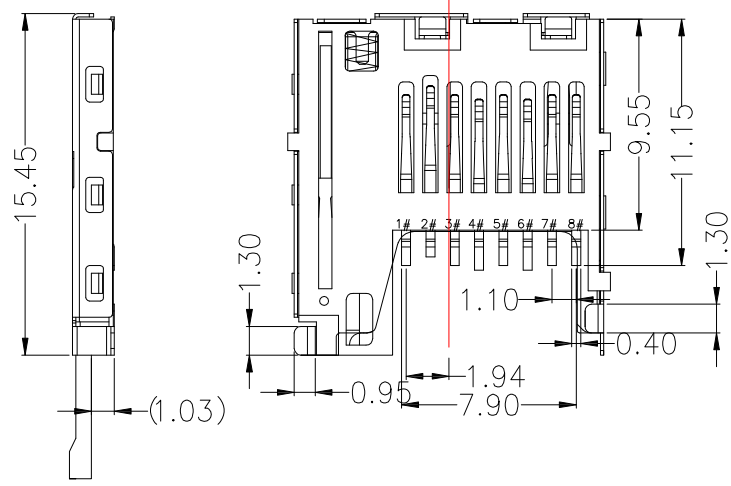
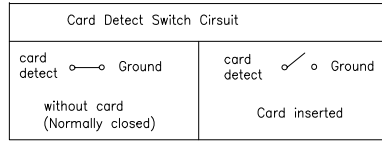
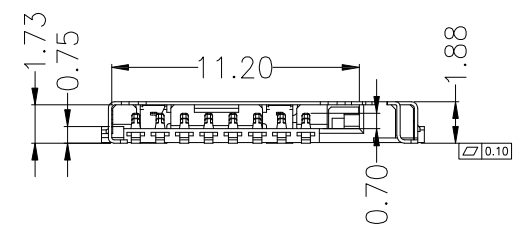


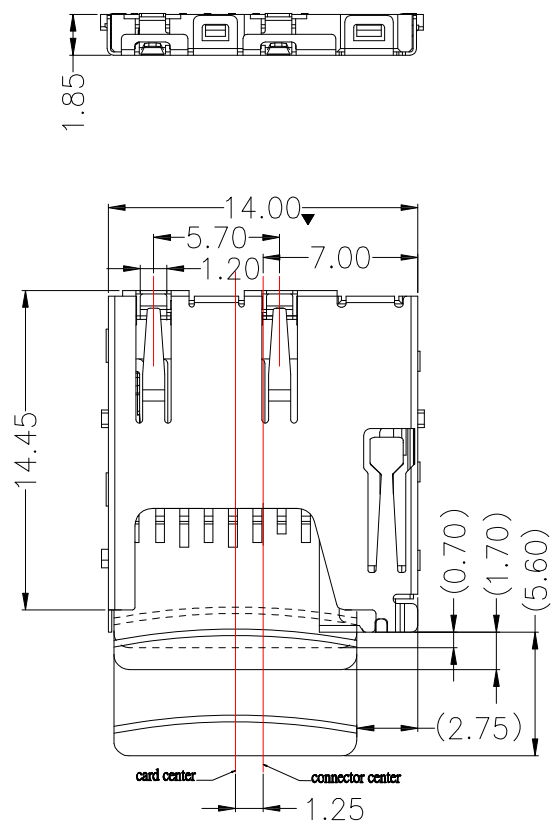

PCB LAYOYT

SPECIFICATION

- Electrical :
- 1. Rating: 0.5A , 100V
 - 2.Contact Resistance: 100 mΩ Max.
 - 3.Insulation Resistance: 1000 MΩ Min.
 - 4.Operating Temperature: -25°C ~85°C
- Material:
- 1.Housing: LCP,Black
 - 2.Contact: Phosphor Bronze
 - 3.Shell: SUS
- Finish:
- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer

MicroSD DEFINITION

PIN NO.	PIN ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

				建倚科技股份有限公司 CONTACT TECHNOLOGY CORP.				DRAWN BY: Jack Lu		DATE: 10/11/18	MAT'L	TITLE	CONNECTOR
								CHECKED BY: Jacky Chen		DATE: 10/11/18			
						APPROVED BY: Tony Kao		DATE: 10/11/18	SCALE: 1 : 1	DWG NO. SD-TFC0001S10-S267	SIZE: A4		
									SHEET NO. 1 of 1	PART NO. SD-TFC0001S10-S267	VER: R2		

2	新增Switch Circuit	Jack	101118
1	更新料號	Jack	100918
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS: MM