

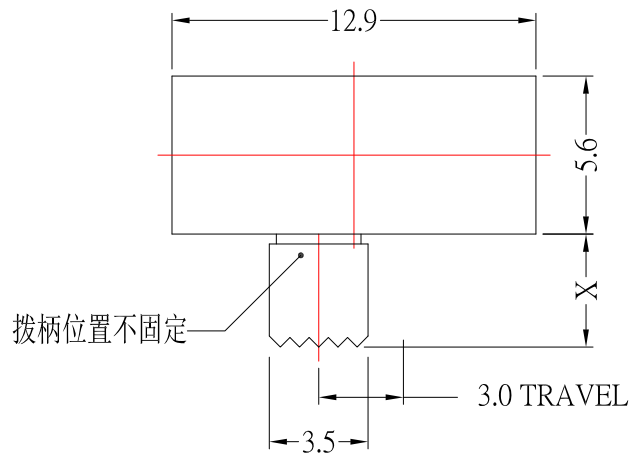
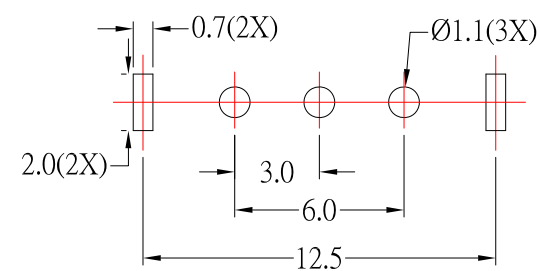


SCHEMATIC

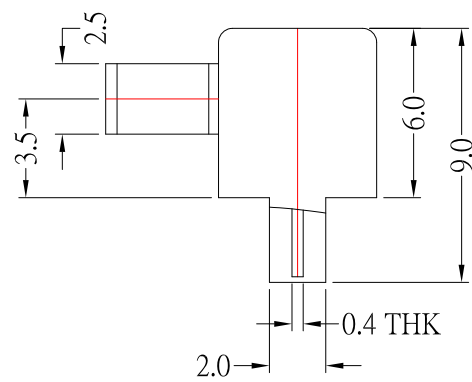

P.C.B LAYOUT

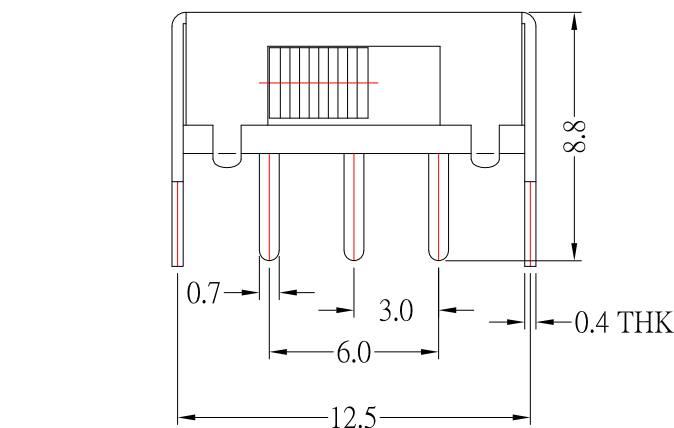

MODEL NO.	X(mm)
SK-12E14A-GA2-S19I	2mm
SK-12E14A-GA3-S19I	3mm
SK-12E14A-GA4-S19I	4mm
SK-12E14A-GA5-S19I	5mm
SK-12E14A-GA6-S19I	6mm
SK-12E14A-GA7-S19I	7mm
SK-12E14A-GA8-S19I	8mm
SK-12E14A-GA9-S19I	9mm

SPECIFICATIONS

Rating	DC 50V 0.5A
Circuit	1P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	350gf ±100gf
Operating Life (cycle)	10,000 Min.

6	Spring	1	Stainless Steel	Natural
5	Contact	1	Brass	Ag-Plating
4	Terminal	3	Brass	Ag-Plating
3	Base	1	Phenolic Resin	Natural
2	Frame	1	SPCC	Ni-Plating
1	Knob	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新圖面	Jack	021425	建倚科技股份有限公司 CONTACT TECHNOLOGY CORP. TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3 3RD. ANGEL'S  UNITS MM	DRAWN BY: DATE		MAT'L		TITLE		SWITCH		
4	更新機柄位置	Jack	082417		CHECKED BY: DATE		FINISH		MODLE		SLIDE SWITCH		
3	更新圖面尺寸	Jack	030515		Jacky Chen 02/14/25		SCALE		1 : 1		DWG NO. SK-12E14A-GAx-S19I		SIZE
2	新增SPEC	Jack	111914		APPROVED BY: DATE		SHEET NO.		1 of 1		PART NO. SK-12E14A-GAx-S19I		A4
1	更新材質	Jack	061913		Tony Kao 02/14/25		VER						R5
ITEM NO.	DESCRIPTION	DRAWN	DATE										