

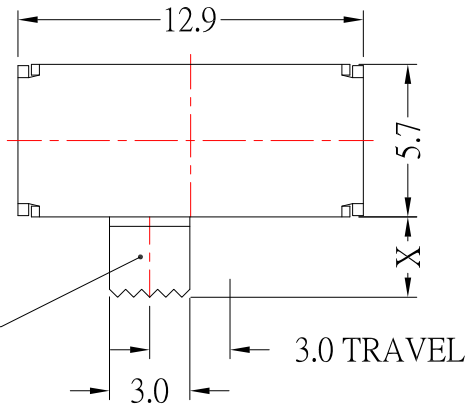
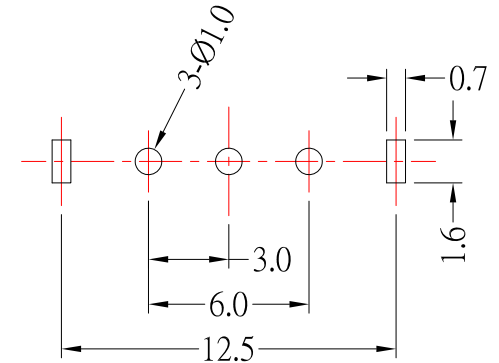


SCHEMATIC

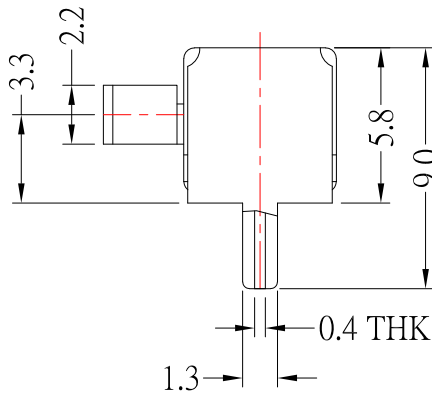

P.C.B LAYOUT
BOTTOM VIEW

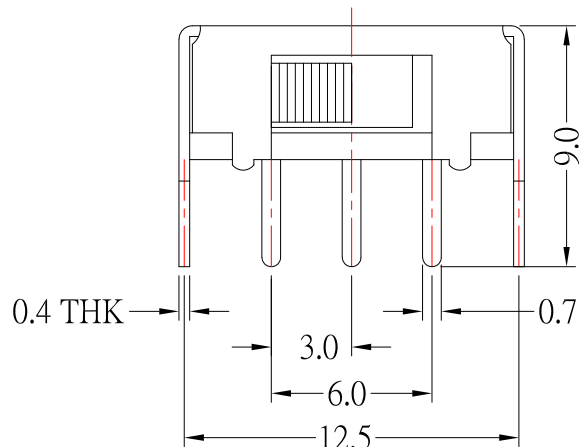

Model No.	X(mm)
SK-12F14-GC2	2mm
SK-12F14-GC3	3mm
SK-12F14-GC4	4mm
SK-12F14-GC5	5mm
SK-12F14-GC6	6mm
SK-12F14-GC7	7mm
SK-12F14-GC8	8mm
SK-12F14-GC9	9mm

SPECIFICATIONS

Rating	DC 12V, 3.0A
Circuit	1P - 2T
Contact Resistance	30mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycles)	10,000

6	SPRING	1	STEEL WIRE	Ni-Plated
5	CONTACT	1	BRASS	Ag-Plated
4	TERMINAL	3	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	KNOB	1	PA66	Black
1	FRAME	1	SPCC	Ni-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/22/26	FINISH	MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SK-12F14-GCx-S191
Jacky Chen	04/22/26	1 : 1	PART NO.	SK-12F14-GCx-S191
APPROVED BY:	DATE	SHEET NO.	1 of 1	VER
Tony Kao	04/22/26			R