
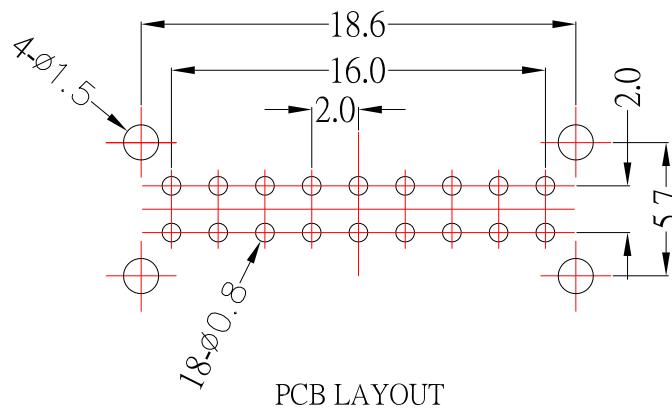
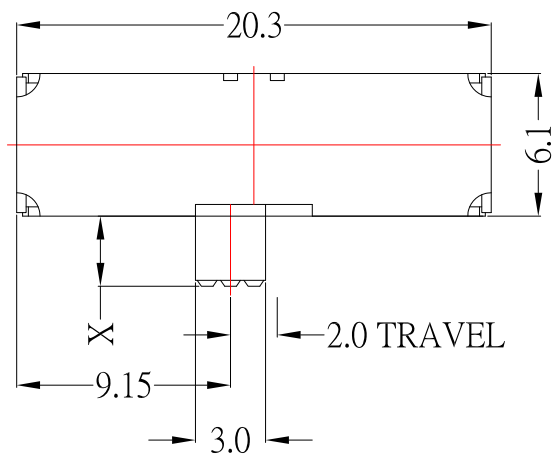
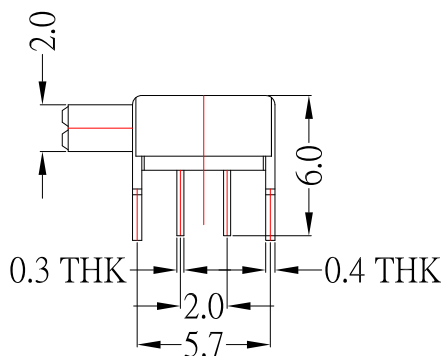


SCHEMATIC (NON-SHORTING)

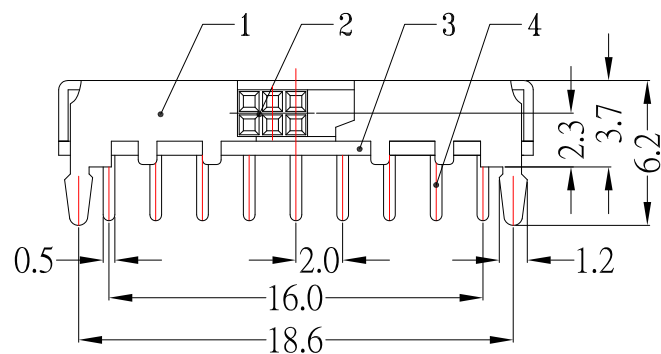

Model No.	X(mm)
SK-62D01P-GA3	3mm
SK-62D01P-GA4	4mm
SK-62D01P-GA5	5mm
SK-62D01P-GA6	6mm

SPECIFICATIONS

Rating	DC 15V 0.5A
Circuit	6P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycle)	10,000 Min.

6	SPRING PLATE	1	SUS	Natural
5	CONTACT CLIP	6	PBS	Ag-Plated
4	TERMINAL	18	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	KNOB	1	PA66	Black
1	FRAME	1	SPCC	Ni-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK
DRAWN BY: Jack Lu		DATE: 07/15/20	MATL:	TITLE: SWITCH
CHECKED BY: Jacky Chen		DATE: 07/15/20	FINISH:	MODLE: SLIDE SWITCH
APPROVED BY: Tony Kao		DATE: 07/15/20	SCALE: 1 : 1	DWG NO. SK-62D01P-GAx-S191
			SHEET NO. 1 of 1	PART NO. SK-62D01P-GAx-S191
				SIZE: A4
				VER: R3



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	新增尺寸	Jack	071520
2	新增SPEC	Jack	080119
1	更新選項	Jack	062419