


Diagram of a horizontal beam with three circular supports. The beam is labeled with a diameter of 0.8. The distance between the first and second support is 2.5, and the distance between the second and third support is 5.0.

Technical drawing of a mechanical assembly, likely a handle or control lever, showing dimensions and labels.

Labels and Dimensions:

- 1.5**: Dimension for the width of the top cylindrical part.
- 2.0 TRAVEL**: Dimension for the travel distance of the top part.
- 3.5**: Dimension for the height of the main body.
- 2.5**: Dimension for the width of the base.
- 5.0**: Dimension for the total width of the base.
- 0.5**: Dimension for the width of the base flange.

The drawing includes a central vertical axis and a horizontal section line. The text "拨柄位置不固定" (Handle position is not fixed) is present in the top left corner.

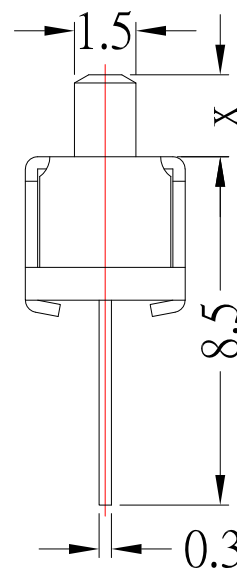

Model No.	X(mm)
SS-12D01-G2	2mm
SS-12D01-G3	3mm
SS-12D01-G4	4mm
SS-12D01-G5	5mm
SS-12D01-G6	6mm
SS-12D01-G7	7mm
SS-12D01-G8	8mm
SS-12D01-G9	9mm

Rating	1.0A 28V DC
FUNCTION	1P2T
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	200gf ± 80gf
Operating Life	10,000 cycle

5	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
4	TERMINAL	3	BRASS	Ag-Plated
3	TERMINAL BASE	1	PHENOL IC RESIN	Natural
2	FRAME	1	SPCC	Ni-Plated
1	KNOB	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

7	更新圖面	Jack	032025
6	更新圖面樣式	Jack	101515
5	更新MODLE	Jack	052915
4	新增SPEC	Jack	111914
3	更新3.9mm的尺寸為4.0mm	Jack	111414
2	新增3.9mm的尺寸	Jack	111214
1	更新尺寸及材質	Jack	031714
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
: Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	03/20/25					
CHECKED BY:	DATE	FINISH		MODLE	SLIDE SWITCH 1P2T 端子腳 L:5.0mm	
Jacky Chen	03/20/25	SCALE	1 : 1	DWG NO.	SS-12D01-Gx-S191	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SS-12D01-Gx-S191	VER R7
Tony Kao	03/20/25					