






DIMENSIONS

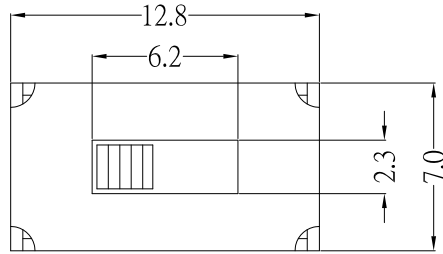

SCHEMATIC

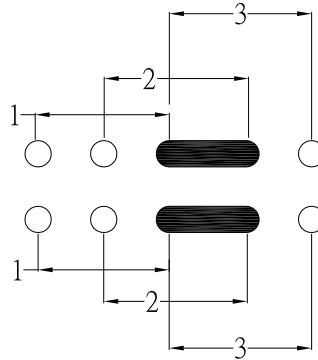

P.C.B MOUNTING PATTERN

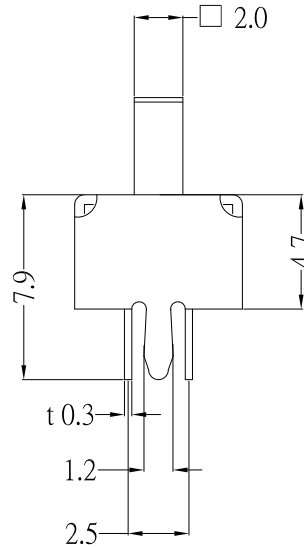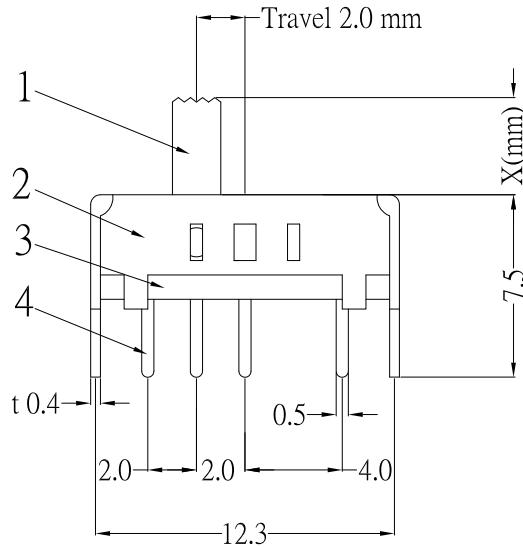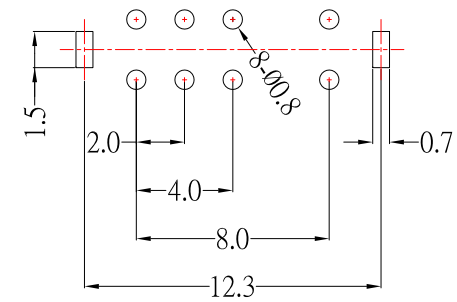

Model No.	X(mm)
SS-23D06-G2	2mm
SS-23D06-G3	3mm
SS-23D06-G4	4mm
SS-23D06-G5	5mm
SS-23D06-G6	6mm
SS-23D06-G7	7mm
SS-23D06-G8	8mm
SS-23D06-G9	9mm

SPECIFICATIONS

Rating	DC 50V 0.5A
Circuit	2P - 3T
Contact Resistance	200m Ω Max.
Insulation Resistance	100M Ω Min.
Operating Force	300gf $\pm$ 100gf
Operating Life (cycles)	10,000

6	CONTACT(CLIP)	2	PHOSPHOR BRONZE	Ag-Plated
5	SHRAPNEL	1	PHOSPHOR BRONZE	
4	TERMINAL	8	BRASS	Ag-Plated
3	TERMINAL BASE	1	PHENOLIC RESIN	Natural
2	FRAME	1	STEEL	Ni-Plated
1	NOB	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/20/14			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	11/20/14			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-23D06-Gx-S191
Tony Kao	11/20/14	1 : 1		
		SHEET NO.	PART NO.	SS-23D06-Gx-S191
		1 of 1		

1	新增SPEC	Jack	112014
ITEM NO.	DESCRIPTION	DRAWN	DATE