
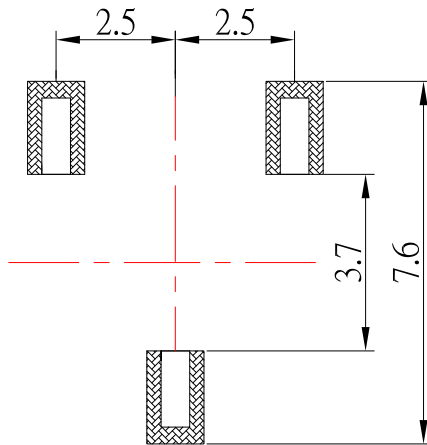
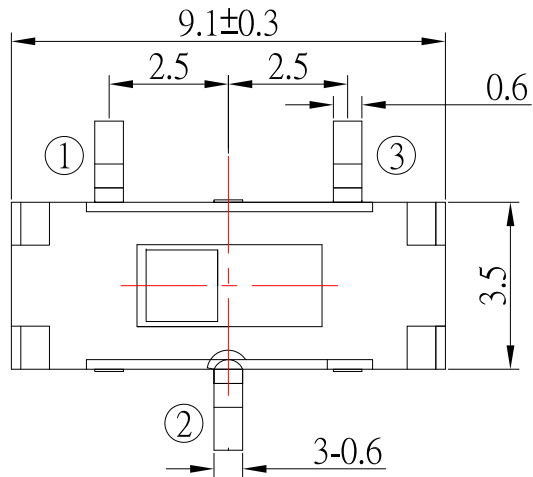


CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles

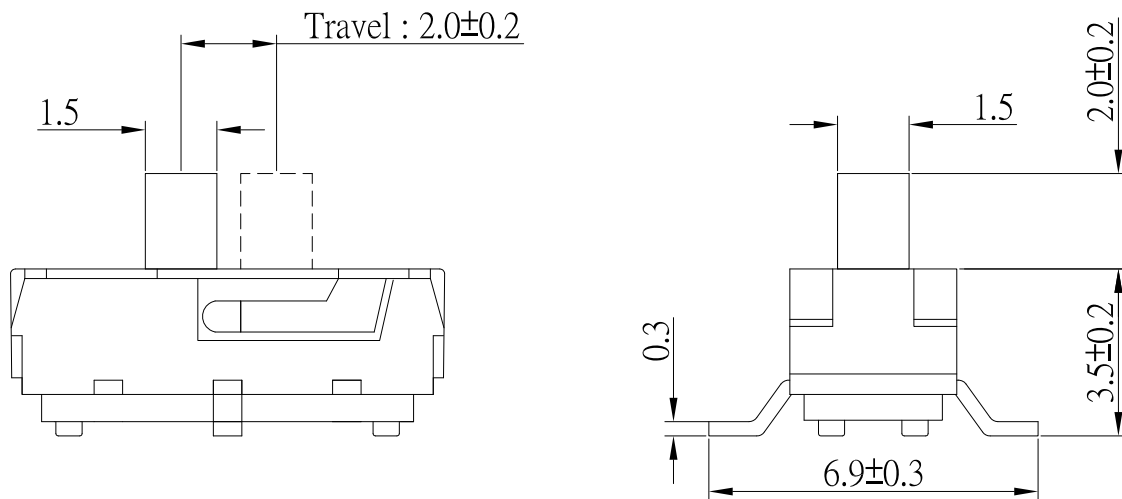

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	NYLON	Black
A	SLIDER	1	NYLON	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	DRAWN BY:	DATE	MATL	TITLE
	Jack Lu	08/24/21		SWITCH
	CHECKED BY:	DATE	FINISH	MODLE
	Jacky Chen	08/24/21		SLIDE SWICTH
	APPROVED BY:	DATE	SCALE	DWG NO.
	Tony Kao	08/24/21	1 : 1	SS-B35S-B-S246
			SHEET NO.	PART NO.
			1 of 1	SS-B35S-B-S246
				SIZE
				A4
				VER
				R1



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

ITEM NO.

DESCRIPTION

DRAWN

DATE

1

新增Travel

Jack

082421