


P.C.B LAND PATTERN

SPECIFICATIONS




Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles

CIRCUIT DIAGRAM



SS-B60x-B-S246

Model No.	X (mm)
SS-B60	2.0
SS-B60A	3.0
SS-B60B	4.5
SS-B60C	4.0
SS-B60D	5.0
SS-B60F	6.0
SS-B60K	7.0

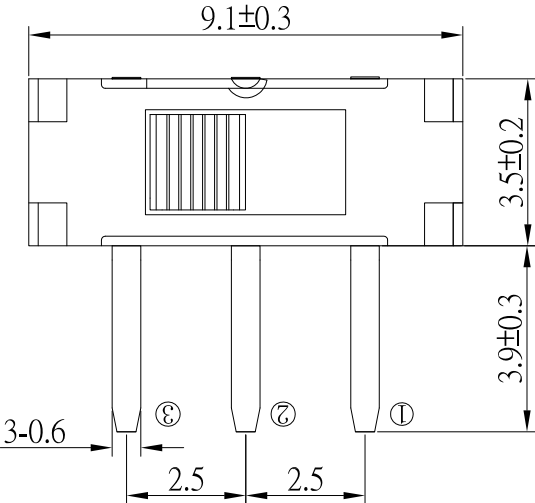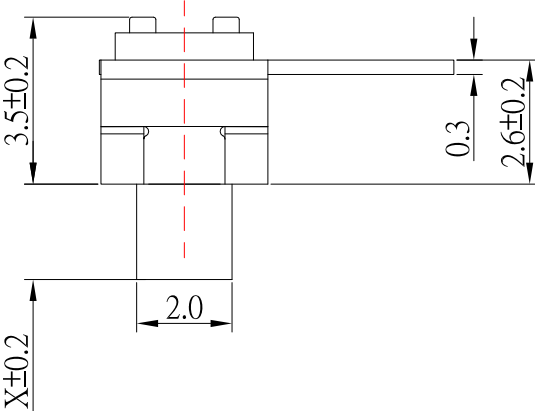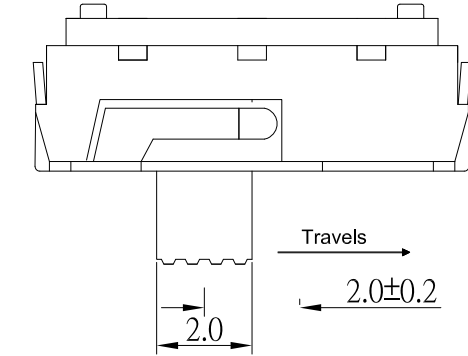

9	更新CIRCUIT DIAGRAM及新增高度選項	Jack	032521
8	更新樣式及尺寸	Jack	032119
7	新增尺寸"2.3"	Jack	041515
6	新增高度選項及更新料號	Jack	031215
5	新增高度選項3.0MM	Jack	111414
4	更新SLIDER COLOR :Black : B	Jack	022614
3	更新SPEC及材質	Jack	071513
2	更新料號	Jack	070413
1	更新Rating	Jack	062813
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3	3RD. ANGEL'S	UNITS	MM
-------------------------------------	---	--------------	-------	----

	E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated		
	D	CLIP	1	PHOSPHOR BRONZE	Ag plated		
	C	COVER	1	SUS			
	B	CASE	1	PA6T	Black		
	A	SLIDER	1	PA46	Black		
	NO.	DESCRIPTION	QTY	MATERIAL	PLATING		
DRAWN BY:		DATE	MAT'L		TITLE	SWITCH	
Jack Lu		12/05/22					
CHECKED BY:		DATE	FINISH		MODLE	SLIDE SWICTH	
Jacky Chen		12/05/22					
APPROVED BY:		DATE	SCALE	1 : 1	DWG NO.	SS-B60x-B-S246	SIZE
Tony Kao		12/05/22					VER
			SHEET NO.	1 of 1	PART NO.	SS-B60x-B-S246	R10