



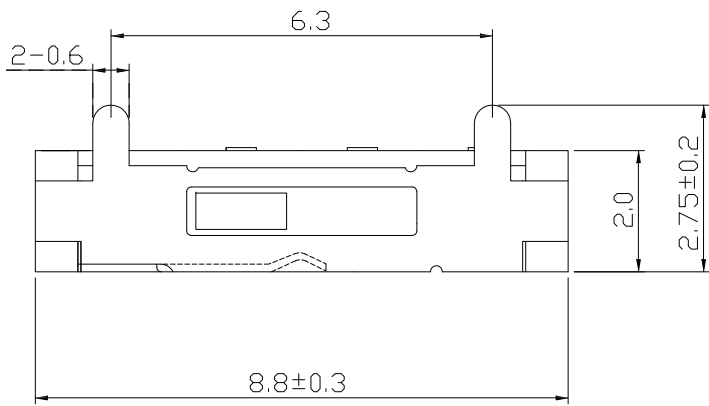




SS-B70-x-S246

SLIDER COLOR :

Black : B
White : W

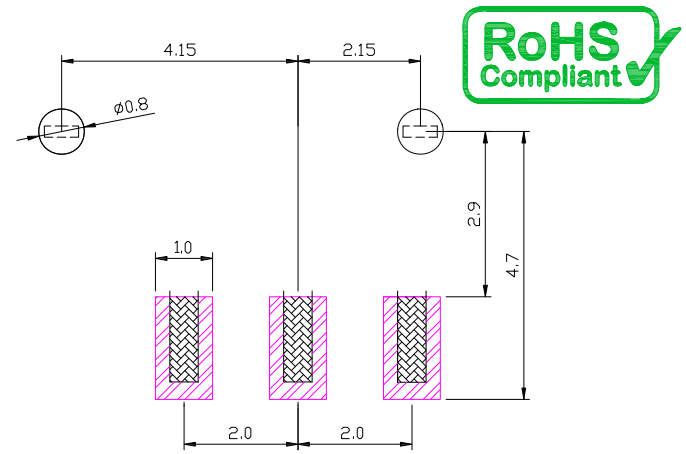

P.C.B LAND PATTERN

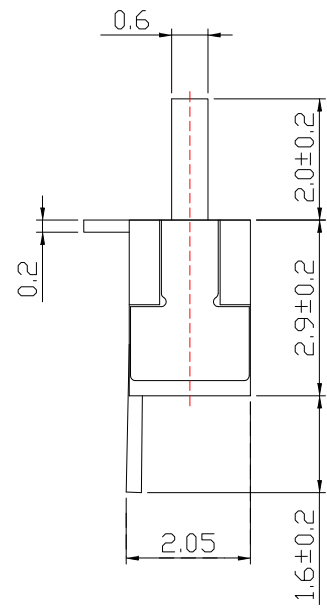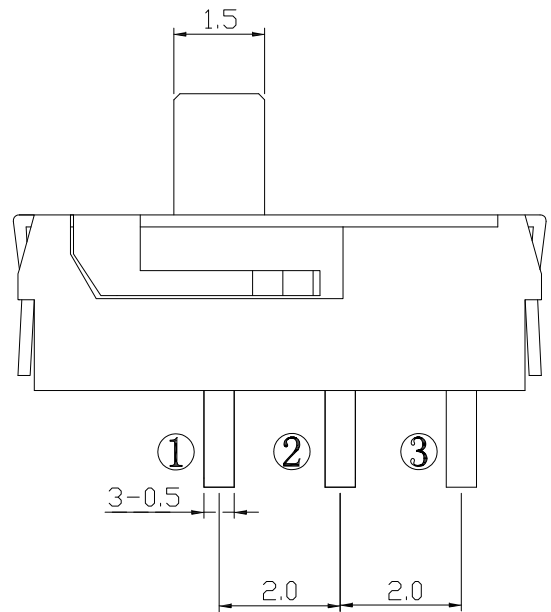

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	120 ± 50gf
Operating Life	10,000 cycles

9	更新CIRCUIT DIAGRAM	Jack	011020	12	更新Operating Force:120 ± 50gf	Jack	051321
8	更新CIRCUIT DIAGRAM	Jack	010920	11	更新材質	Jack	031621
7	更新為A0版	Jack	080417	10	更新圖面	Jack	022521
6	新增PIN編號	Jack	030816				
5	更新顏色選項	Jack	101415				
4	更新圖面	Jack	102114				
3	更新材質及SPEC	Jack	110613				
2	更新材質	Jack	103113				
1	更新圖面視圖位置	Jack	102313				
ITEM NO.	DESCRIPTION	DRAWN	DATE				

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S

UNITS MM

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	PA6T	Black
A	SLIDER	1	PPA	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	DRAWN BY:	DATE	MAT'L	TITLE
	Jack Lu	05/13/21		SWITCH
	CHECKED BY:	DATE	FINISH	MODLE
	Jacky Chen	05/13/21		SLIDE SWICTH
	APPROVED BY:	DATE	SCALE	DWG NO.
	Tony Kao	05/13/21	1 : 1	SS-B70-x-S246
			SHEET NO.	PART NO.
			1 of 1	SS-B70-x-S246
				SIZE
				A4
				VER
				R12