


# SS-B80x1-x-S246



Model No.	X (mm)
Blank	2.0
A	4.0

SLIDER COLOR :



Black : B
White : W



CIRCUIT DIAGRAM

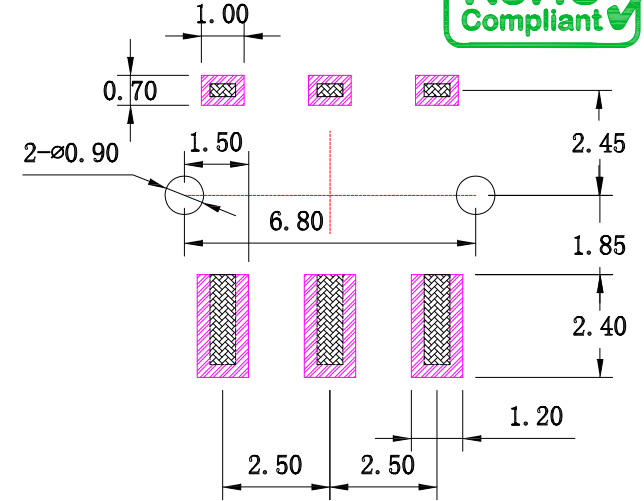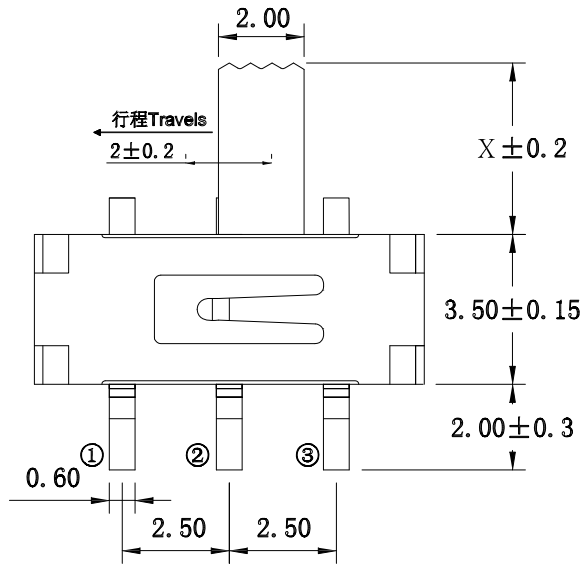

P.C.B LAND PATTERN

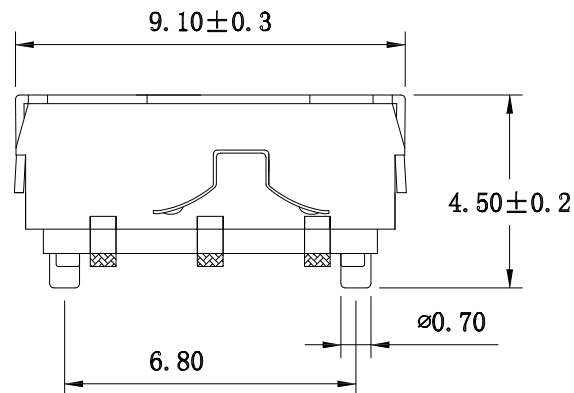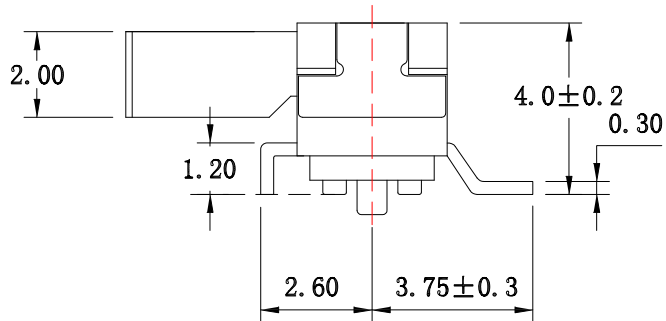

### SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	PA6T	Black
A	SLIDER	1	PA46	Black

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	更新圖面	Jack	060923
5	更新材質	Jack	011623
4	新增柄長選項	Jack	112522
3	更新圖面	Jack	092319
2	更新圖面	Jack	122618
1	新增尺寸	Jack	112217

**CONTACT** 建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S



UNITS MM

DRAWN BY:	DATE
Jack Lu	06/09/23
CHECKED BY:	DATE
Jacky Chen	06/09/23
APPROVED BY:	DATE
Tony Kao	06/09/23

MAT'L		TITLE	SWITCH
FINISH		MODLE	SMT SLIDE SWITCH 撥柄鋸齒狀
SCALE	1 : 1	DWG NO.	SS-B80x1-x-S246
SHEET NO.	1 of 1	PART NO.	SS-B80x1-x-S246
		SIZE	A4
		VER	R6