


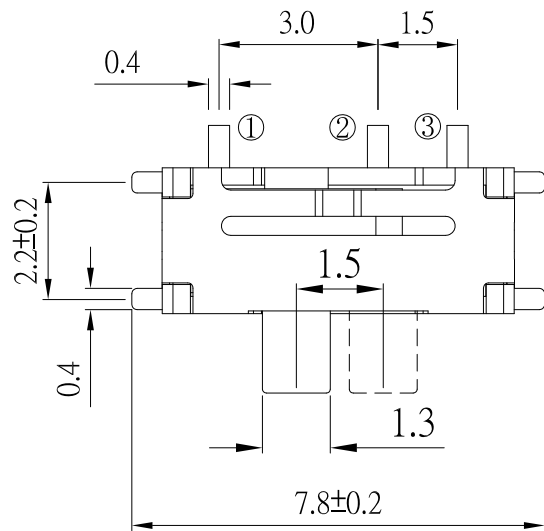

SS-B91APxx-x-S246

Model No.	X (mm)
SS-B91AP	1.5
SS-B91APK	2.0
SS-B91APL	2.5


SLIDER COLOR :

Black : B


White : W

COVER PLATING :

Model No.	Plating
BLANK	Nickel
1	Ag

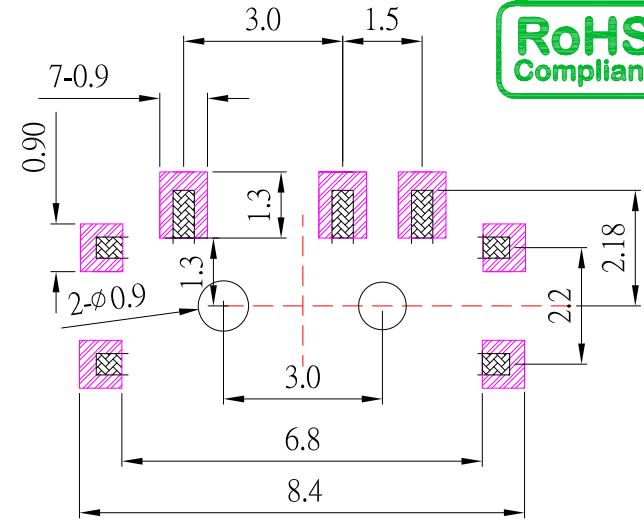



P.C.B LAND PATTERN



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	100MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	150 ± 30gf
Operating Life	10,000 cycles

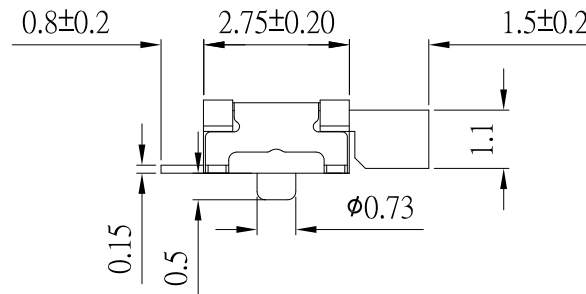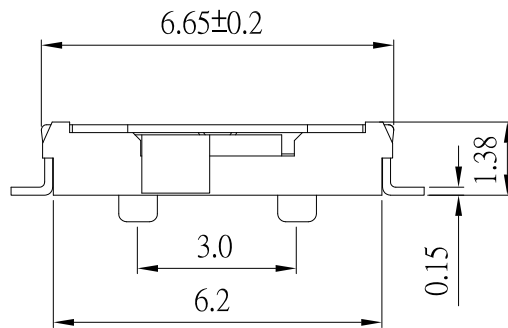

8	新增COVER PLATING选项	Jack	022124
7	新增PCB LAYOUT尺寸	Jack	050322
6	更新Operating Force	Jack	101221
5	更新Operating Force	Jack	011521
4	新增操作行程	Jack	011221
3	更新材质	Jack	112620
2	更新圖面	Jack	112520
1	新增柄長选项	Jack	090420
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
02/21/24
DATE
02/21/24
DATE
02/21/24

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

SWITCH
SLIDE SWICTH
SS-B91APxx-x-S246
SS-B91APxx-x-S246

SIZE
A4
VER
R8