

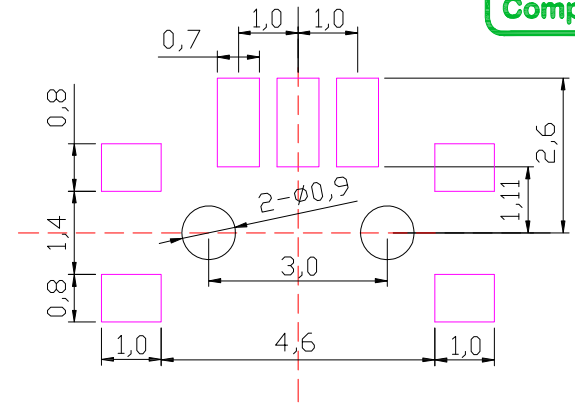
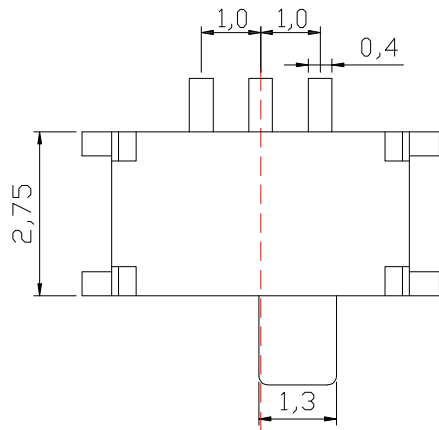


CIRCUIT DIAGRAM

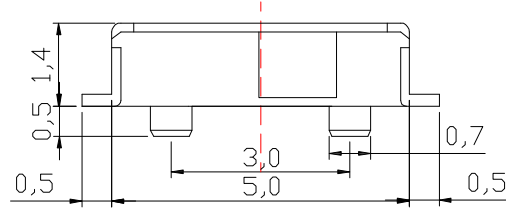

P.C.B LAND PATTERN

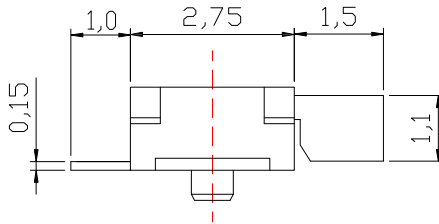

SPECIFICATIONS

Rating	50mA , 12V DC
Contact Resistance	70mΩ Max.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Insulation Resistance	100MΩ Min.
Operating Force	150 ± 50gf
Operating Life	10,000 cycles
Travel	1.0 ± 0.2mm

F	SPRING STRIP	1	SUS	
E	TERMINAL	1	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	QBE2	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	NYLON	Black
A	SLIDER	1	NYLON	White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	10/24/23			
CHECKED BY:	DATE	FINISH	MODLE	SMT SLIDE SWICTH
Jacky Chen	10/24/23			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-B92AP-W-S463
Tony Kao	10/24/23	1 : 1		
		SHEET NO.	PART NO.	SS-B92AP-W-S463

ITEM NO.	DESCRIPTION	DRAWN	DATE