

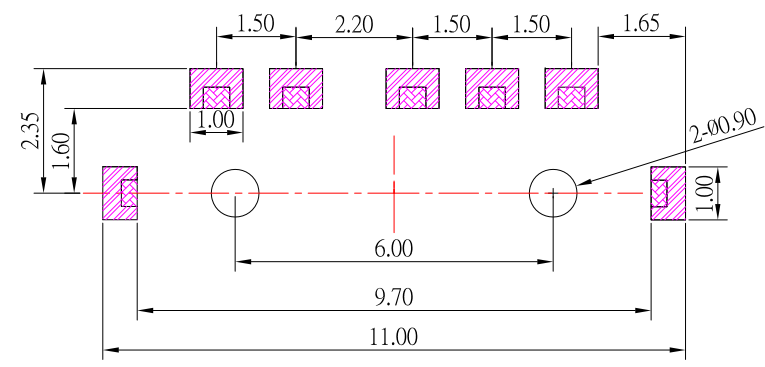


CIRCUIT DIAGRAM

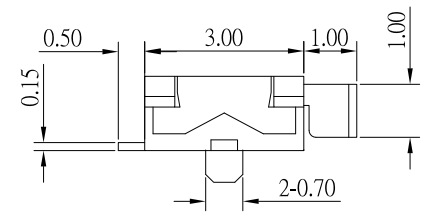

P.C.B LAND PATTERN

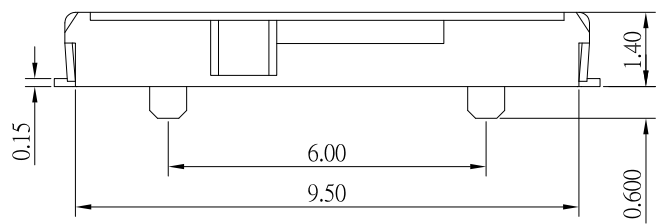

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	120 ± 50gf
Operating Life	10,000 cycles

F	SPRING	1	SUS	
E	TERMINAL	5	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/14/17			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWICTH 1P3T 右復位
Jacky Chen	03/14/17			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-C76R-3-S246
Tony Kao	03/14/17	1 : 1		
		SHEET NO.	PART NO.	SS-C76R-3-S246
		1 of 1		
				SIZE A4
				VER R1

1	更新材質	Jack	031417
ITEM NO.	DESCRIPTION	DRAWN	DATE