

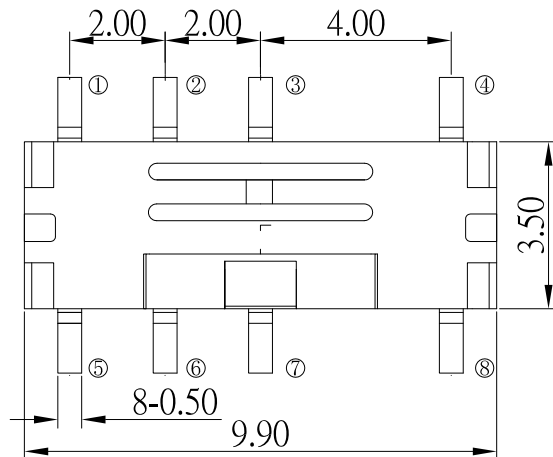
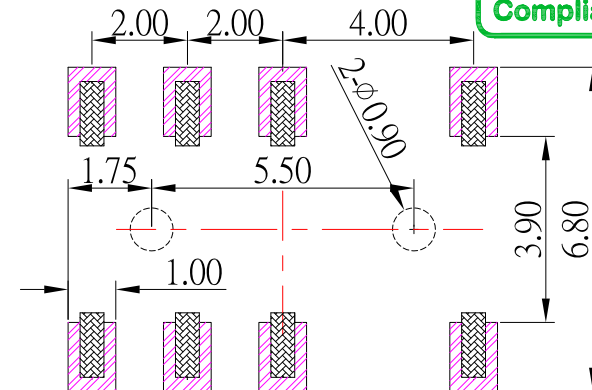


CIRCUIT DIAGRAM

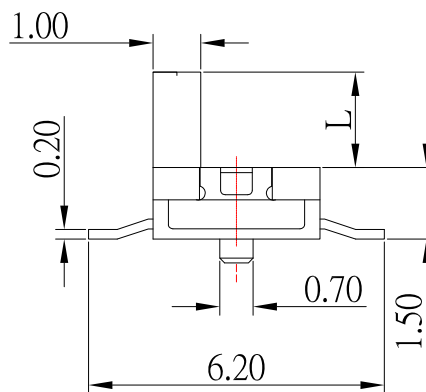

P.C.B LAND PATTERN

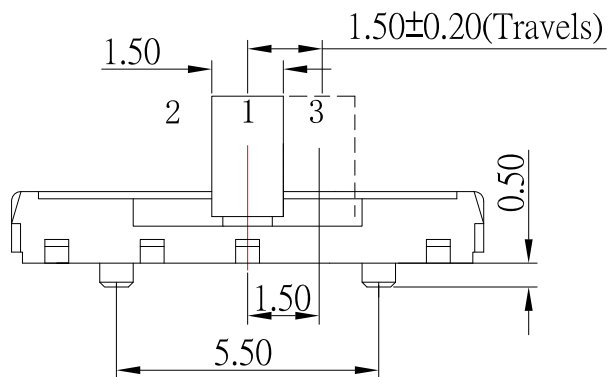

Model No.	L (mm)
SS-C91	1.0
SS-C91B	2.0
SS-C91C	3.0

SPECIFICATIONS

Rating	0.3A 4V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 70gf
Operating Life	10,000 cycles

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

7	新增Travels及更新Operating Force和更新CIRCUIT DIAGRAM	Jack	113020
6	新增柄高选项	Jack	102020
5	更新外型樣式	Jack	041119
4	更新外型樣式	Jack	032819
3	更新外型樣式	Jack	030519
2	更新為AO版	Jack	062617
1	更新材質	Jack	111513
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/30/20			
CHECKED BY:	DATE	FINISH	MODLE	SLIDE SWITCH
Jacky Chen	11/30/20			
APPROVED BY:	DATE	SCALE	DWG NO.	SS-C91x-S246
Tony Kao	11/30/20	1 : 1		
		SHEET NO.	PART NO.	SS-C91x-S246
		1 of 1		
				SIZE A4
				VER R7