
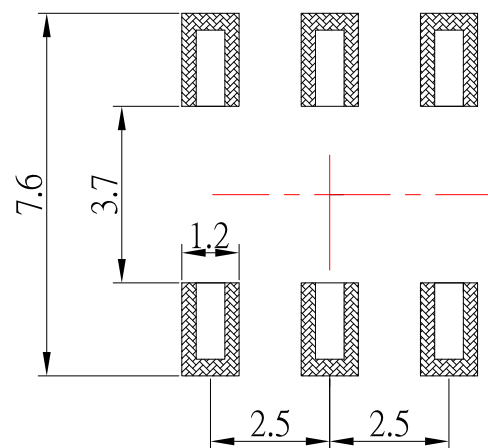






Technical drawing of a mechanical part with dimensions:

- Overall width: 3.5
- Overall height: 1.7
- Top flange width: 1.5
- Central slot width: 2.0
- Bottom flange width: 2.5
- Bottom flange height: 1.7
- Top flange height: 1.5
- Central slot height: 2.0
- Bottom flange height: 1.7
- Top flange height: 1.5
- Central slot height: 2.0
- Bottom flange height: 1.7

SS-D45S_x-x-S246

Model No.	X (mm)	
SS-D45S	2.0	
SS-D45SA	4.0	

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

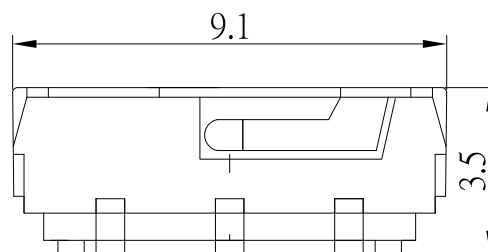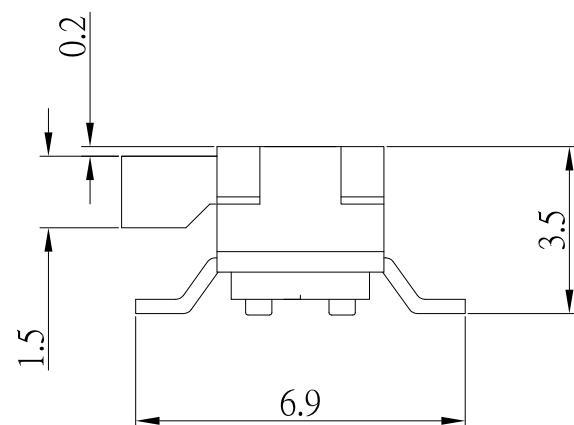

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DATE 03/15/17	MAT'L		TITLE	SWITCH
DATE 03/15/17	FINISH		MODLE	SMT SLIDE SWICTH
DATE 03/15/17	SCALE	1 : 1	DWG NO.	SS-D45Sx-x-S246
	SHEET NO.	1 of 1	PART NO.	SS-D45Sx-x-S246

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	03/15/1
CHECKED BY:	DATE
Jacky Chen	03/15/1
APPROVED BY:	DATE
Tony Kao	03/15/1

7	MAT'L
7	FINISH
7	SCALE
7	SHEET NO

TITLE	SWITCH
MODLE	SMT SLIDE SWICHT
DWG NO.	SS-D45Sx-x-S246
PART NO.	SS-D45Sx-x-S246

	SIZE
	A4
	VER
	A0