
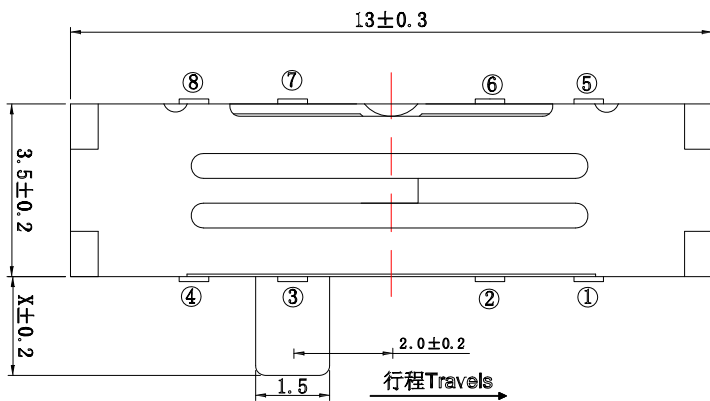


KNOB HEIGHT

Model	X(mm)
SS-F46-B-S246	2.0
SS-F46B-B-S246	4.0

SPECIFICATIONS

Rating	100mA 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100m Ω Max.
Operating Force	230 $\pm$ 70gf
Operating Life	10,000 cycles

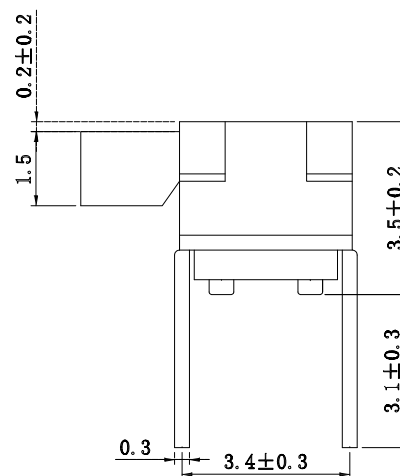

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	更新樣式和材質	Jack	011623	
4	更新圖面	Jack	111521	
3	更新樣式	Jack	041219	
2	更新為A0版	Jack	030216	
1	更新圖面	Jack	082514	
ITEM NO.	DESCRIPTION	DRAWN	DATE	

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	01/16/23

CHECKED BY:	DATE
Jacky Chen	01/16/23

APPROVED BY:	DATE
Tony Kao	01/16/23

MAT'L

FINISH

SCALE

TITLE

MODLE

DWG NO.

SWITCH

SLIDE SWITCH

SS-F46x-B-S246

SIZE
A4

	VER
--	-----

R5