

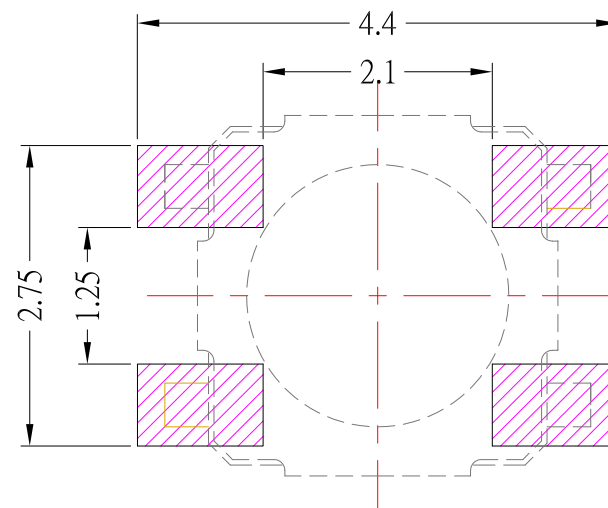
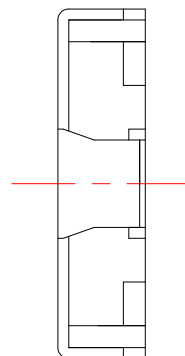


## DIMENSIONS

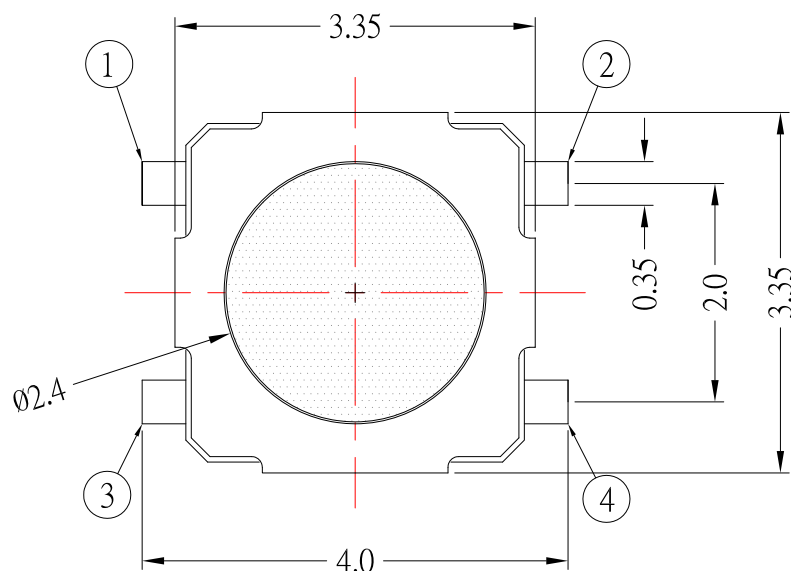

## CIRCUIT DIAGRAM



## SPECIFICATIONS

|                         |                  |            |
|-------------------------|------------------|------------|
| Rating                  | DC 12V 50mA Max. |            |
| Contact Resistance      | 100mΩ Max.       |            |
| Travel                  | 0.15 ± 0.1mm     |            |
| Operating Force         | 2:160±50gf       | 3:260±50gf |
| Operating Life (cycles) | 100,000          |            |



建倚科技股份有限公司  
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS  
OTHERWISE STATED :

|               |       |
|---------------|-------|
| Up to 5       | ±0.2  |
| Above 5 ~ 15  | ±0.3  |
| Above 15 ~ 30 | ±0.4  |
| Above 30 ~ 50 | ±0.5  |
| Angle         | ±0.3° |

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:  
Frank Wu  
CHECKED BY:  
Jacky Chen  
APPROVED BY:  
Tony Kao

DATE  
06/26/12  
DATE  
06/26/12  
DATE  
06/26/12

MAT'L  
FINISH  
SCALE  
SHEET NO.

1 : 1  
1 of 1

TITLE  
MODLE  
DWG NO.  
PART NO.

SWITCH  
TACT SWITCH  
TS-307PF-x-S126  
TS-307PF-x-S126

|      |
|------|
| SIZE |
| A4   |
| VER  |
| A    |