

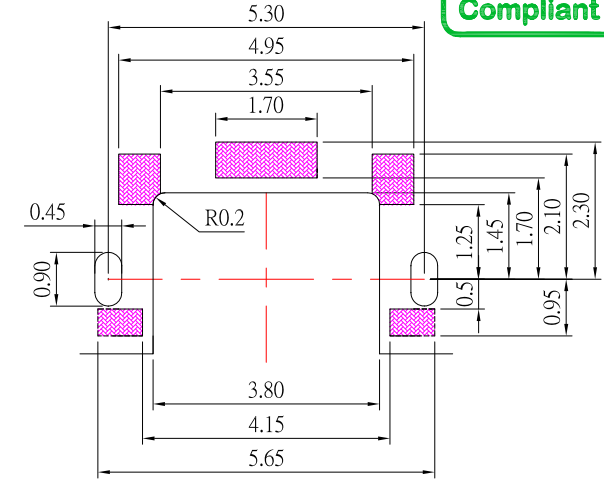
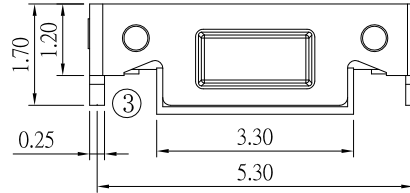


CIRCUIT DIAGRAM

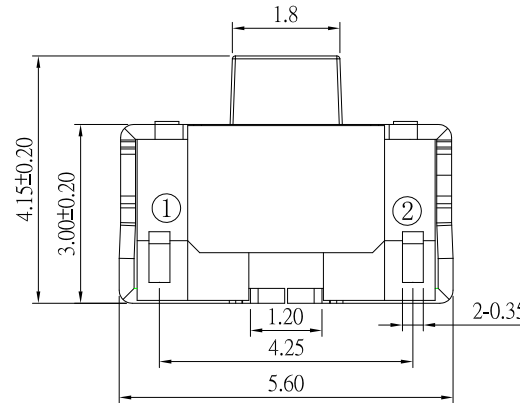

P.C.B LAND PATTERN



SPECIFICATIONS

Rating	50mA, 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V
Contact Resistance	100mΩ Max.
Operating Force	160 ± 40gf
Travel	0.2 ± 0.1mm
Operating Life	50,000 cycles

E	THERMINAL	2	PHOSPHOR BRONZE	Ag plated
D	CONTACT	3	STAINLESS STEEL	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	BASE	1	LCP	White
A	STEM	1	LCP	White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

5	新增Travel	Jack	022323
4	更新CONTACT數量	Jack	011022
3	更新規格	Jack	111921
2	新增COVER 鍍層	Jack	102121
1	更新材質顏色	Jack	102318
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT

建倚科技股份有限公司

CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2

Above 5 ~ 15 ±0.3

Above 15 ~ 30 ±0.4

Above 30 ~ 50 ±0.5

Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	SWITCH
Jack Lu	02/23/23			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	02/23/23			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A28- 2-S246
Tony Kao	02/23/23	1 : 1		
		SHEET NO.	PART NO.	TS-A28- 2-S246
		1 of 1		
				SIZE A4
				VER R5