

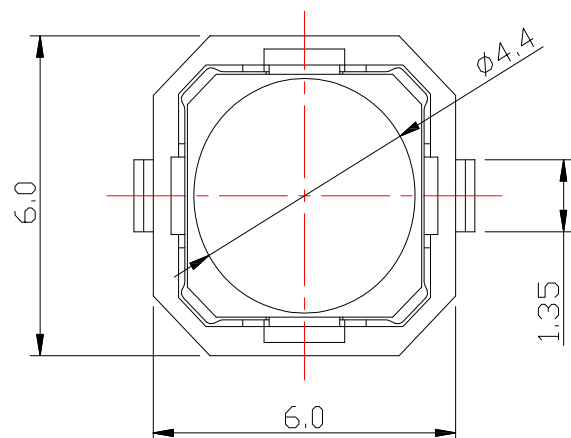
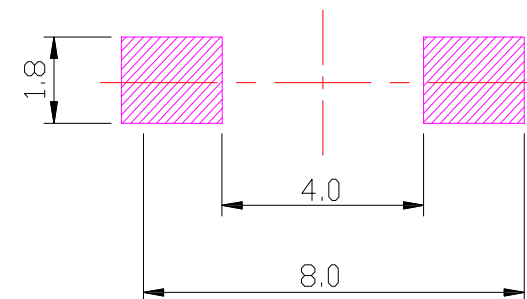


CIRCUIT DIAGRAM



P.C.B LAYOUT MOUNTING PATTERN

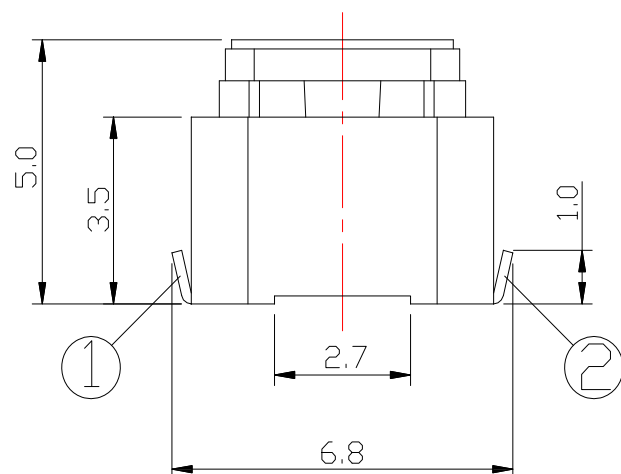

SPECIFICATIONS

Rating	DC 12V 50mA Max.				
Contact Resistance	100 mΩ Max.				
Travel	1.30±0.1 mm				
Operating Force	1	120 ± 30gf	2	180 ± 50gf	3 250 ± 50gf 4 320 ± 50gf
Operating Life (cycles)	100,000				80,000

CONTACT

建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/26/18
DATE: 09/26/18
DATE: 09/26/18

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: SWITCH
MODLE: TACT SWITCH
DWG NO.: TS-A32USA-x-S138
PART NO.: TS-A32USA-x-S138

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	新增Operating Force:320±50gf	Jack	092618