


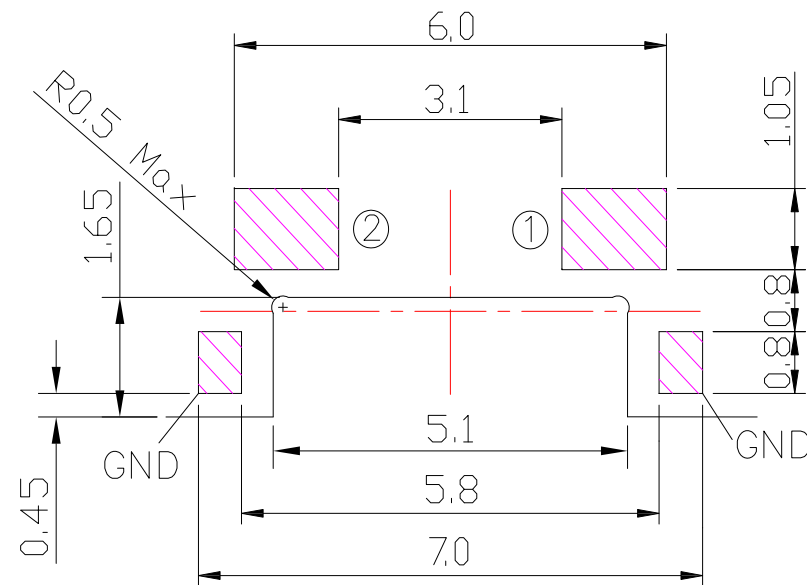
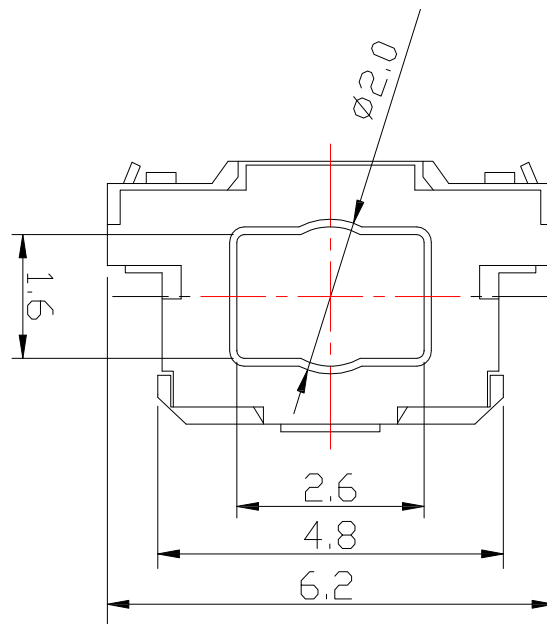


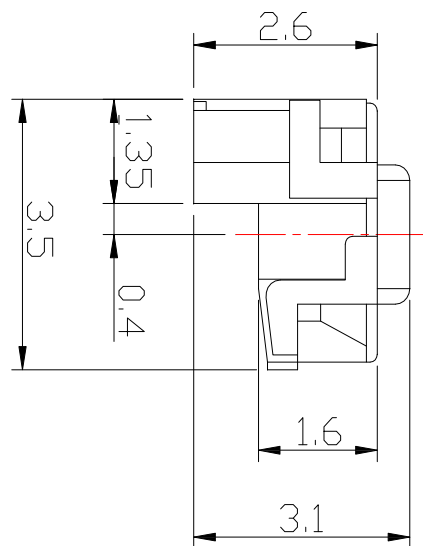

P.C.B LAYOUT



CIRCUIT DIAGRAM

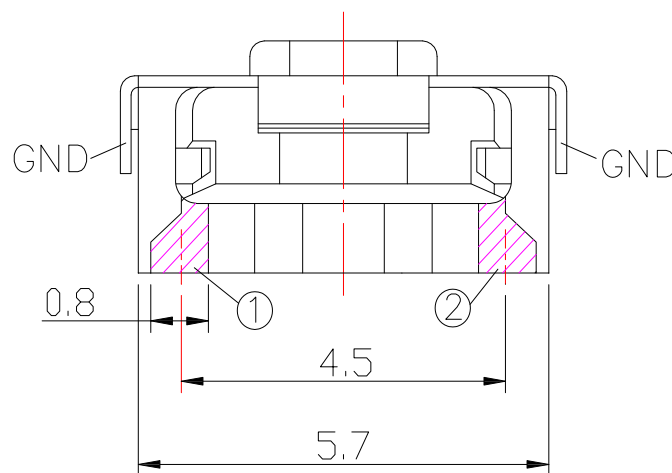

SPECIFICATIONS

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Insulation Resistance	100MΩ Min		
Travel	0.25±0.1mm		
Operating Force	2	160 ± 50gf	3 250 ± 50gf
Operating Life (cycles)	100,000		
Operating Temperature Range	-20° ~ +70° C		
Storage Temperature Range	-40° ~ +85° C		



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
12/07/15
DATE
12/07/15
DATE
12/07/15

MAT'L		TITLE	SWITCH	
FINISH		MODLE	TACT SWITCH	
SCALE	1 : 1	DWG NO.	TS-A34-x-S138	SIZE A4
SHEET NO.	1 of 1	PART NO.	TS-A34-x-S138	VER R3