

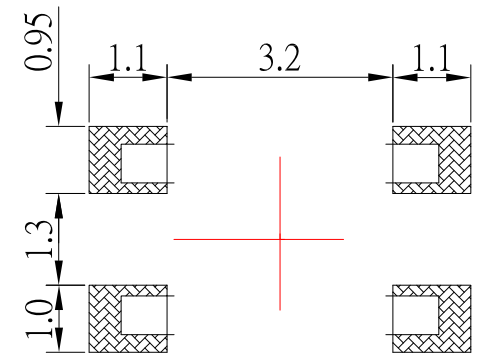
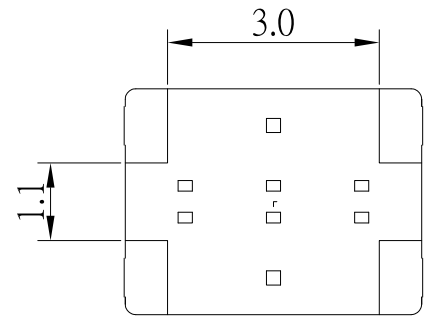
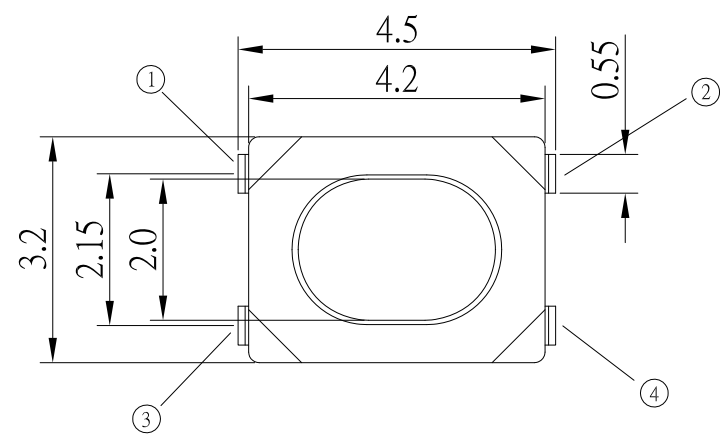




PCB LAYOUT

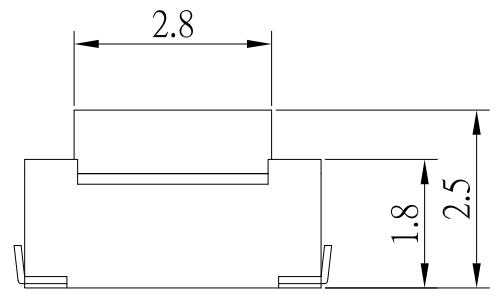

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 16V 50mA.			
Insulation Resistance	100 M Ω Min.			
Contact Resistance	100 m Ω Max.			
Travel	0.15 $\pm$ 0.1mm			
Operating Force	2	160 $\pm$ 50gf	3	260 $\pm$ 50gf
Operating Life (cycles)	100,000	50,000		

E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	2	SUS	Ag plated
C	COVER	1	SUS	
B	BASE	1	LCP	WHITE
A	STEM	1	PA6T	WHITE
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu		DATE: 08/13/15	MAT'L:	TITLE: SWITCH
CHECKED BY: Jacky Chen		DATE: 08/13/15	FINISH:	MODLE: TACT SWITCH 雙彈片
APPROVED BY: Tony Kao		DATE: 08/13/15	SCALE: 1 : 1	DWG NO. TS-A45-xS-S246
			SHEET NO. 1 of 1	PART NO. TS-A45-xS-S246
				SIZE: A4
				VER: R1

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 $\pm$ 0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 $\pm$ 0.3			
	Above 15 ~ 30 $\pm$ 0.4			
	Above 30 ~ 50 $\pm$ 0.5			
	Angle $\pm$ 0.3°			

1	新增Operating Force:320gf及更新Travel	Jack	081315
ITEM NO.	DESCRIPTION	DRAWN	DATE