


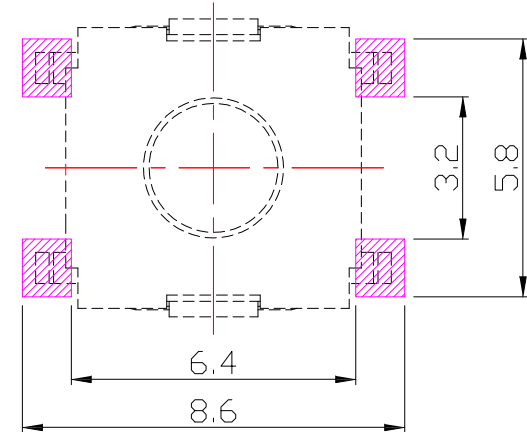

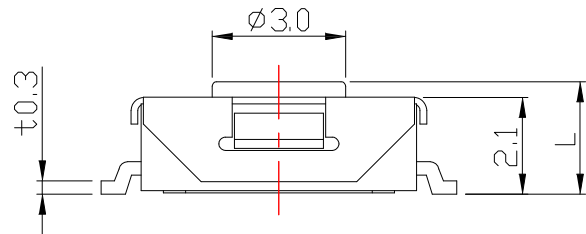




P.C.B MOUNTING PATTERN DIMENSION

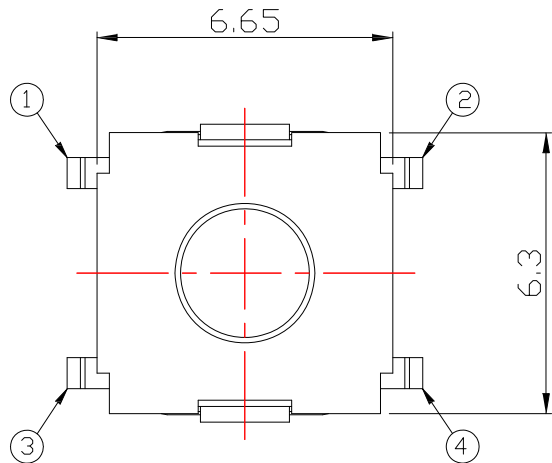

CIRCUIT DIAGRAM

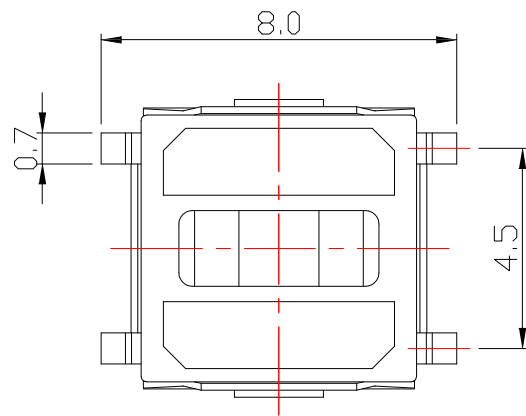

TS-A57AxND-x-S126

X	L (mm)
S	2.5
H	3.1
K	3.4
Q	3.8

Operating Force

SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.25 ± 0.1mm			
Operating Force	1	130 ± 30gf	2	160 ± 50gf
	3	250 ± 50gf	4	360 ± 50gf
Operating Life (cycles)	200,000			

▲ Dimension without included cover.

* STEM COLOR : RED

E	TERMINAL	4	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	
A	STEM	1	PA6T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

8	更新材質	Jack	112923
7	新增材質及Operating Life	Jack	031821
6	新增材質表	Jack	080620
5	更新圖面	Jack	101718
4	更新Operating Life	Jack	122017
3	更新Operating Life及新增Operating Force:360 ± 50gf	Jack	121117
2	更新L選項	Jack	031516
1	更新外觀型式	Jack	093015
ITEM NO.	DESCRIPTION	DRAWN	DATE

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15 ±0.3			
	Above 15 ~ 30 ±0.4			
	Above 30 ~ 50 ±0.5			
	Angle ±0.3°			

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	11/29/23			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	11/29/23			
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A57AxND-x-S126
Tony Kao	11/29/23	1 : 1	PART NO.	TS-A57AxND-x-S126
		SHEET NO.	1 of 1	SIZE A4
				VER R8