


- Operating Force





CIRCUIT DIAGRAM

SPECIFICATIONS



Rating	DC 12V 50mA.					
Insulation Resistance	100 M Ω Min.					
Contact Resistance	100 m Ω Max.					
Dielectric Withstanding Voltage	AC 250V(50Hz) 1 min					
Operating Force	2	180 $\pm$ 50gf	3	250 $\pm$ 50gf	4	320 $\pm$ 50gf
Operating Life (cycles)	500,000		300,000		200,000	

E	STEM	4	RUBBER	BLUE
D	COVER	1	SUS	
C	CONTACT	1	SUS	Ag plated
B	TERMINAL	1	BRASS	Ag plated
A	BASE	1	PA6T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	05/22/19					
CHECKED BY:	DATE	FINISH		MODLE	TACT SWITCH	
Jacky Chen	05/22/19					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	TS-A58x-x-S138	SIZE
Tony Kao	05/22/19	SHEET NO.	1 of 1	PART NO.	TS-A58x-x-S138	A4
						VER
						R

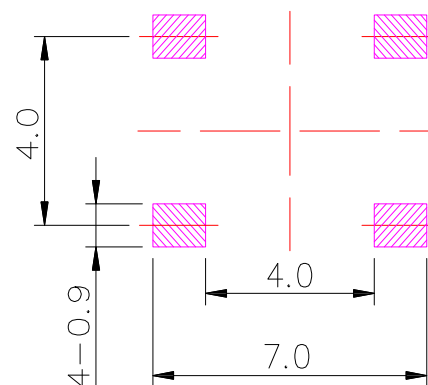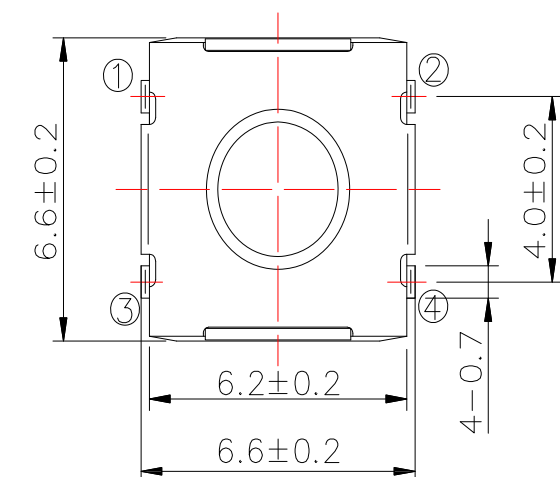

PCB LAYOUT

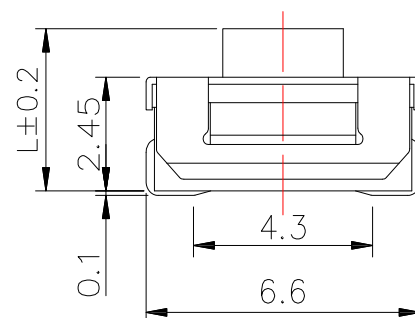

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
--	--	---------------------------------------	-----------------	---	-------	----