
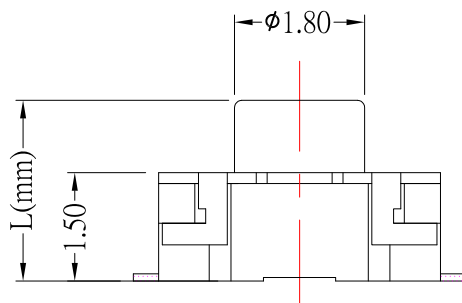
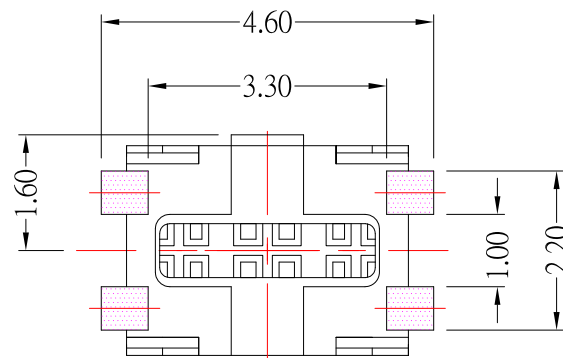

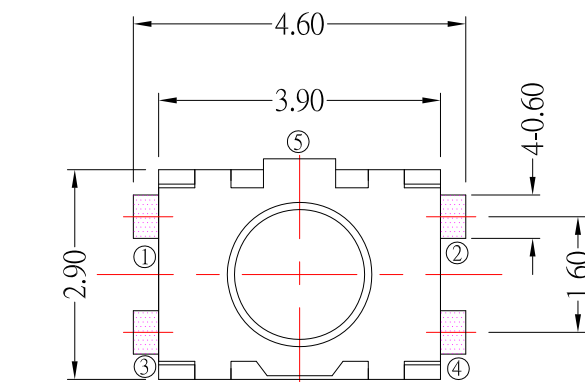


CIRCUIT DIAGRAM

MODEL NO.	L (mm)
TS-A85BPG-x-1.8	1.8
TS-A85BPG-x-2.0	2.0
TS-A85BPG-x-2.5	2.5
TS-A85BPG-x-7.0	7.0

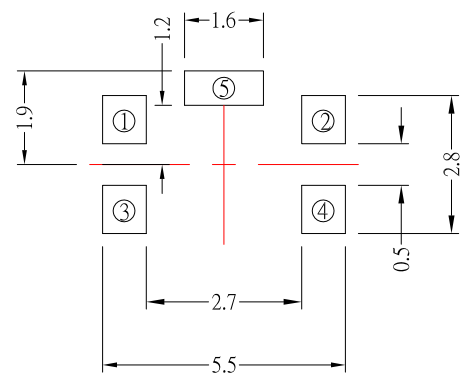

SMD REFLOW PATTERN

SPECIFICATIONS

Rating	DC 12V 50mA Max.				
Circuit	1C - 1P				
Contact Resistance	100mΩ Max.				
Travel	0.15 ± 0.1mm				
Operating Force	0	100 ± 30gf	1	130 ± 30gf	2 160 ± 50gf 3 250 ± 50gf
Operating Life (cycles)	100,000				

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新"L"選項	Jack	101515
3	更新Travel及新增"L"選項	Jack	072313
2	更新圖面背面圖	Jack	071513
1	新增OF選項	Jack	070413



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH	
Jack Lu	10/15/15				
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH	
Jacky Chen	10/15/15				
APPROVED BY:	DATE	SCALE	DWG NO.	TS-A85BPG-x-x-S126	SIZE
Tony Kao	10/15/15	1 : 1			A4
		SHEET NO.	PART NO.	TS-A85BPG-x-x-S126	VER
		1 of 1			A4