


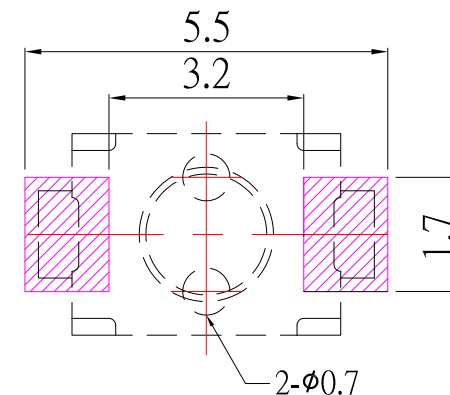



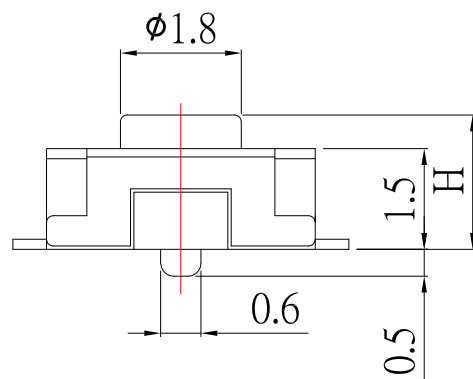

P.C.B. LAYOUT MOUNTING PATTERN

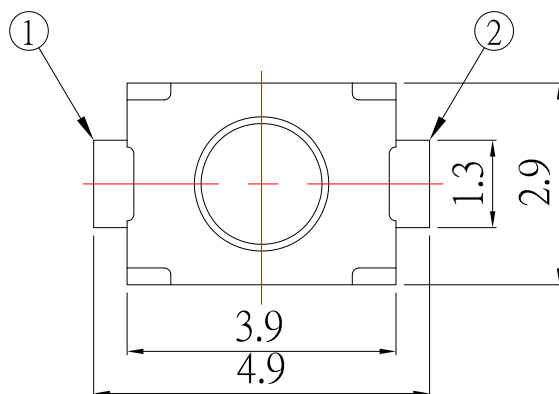

Model No.	H (mm)	Knob Color
TS-A85E	2.0	BLACK
TS-A85AE	2.5	BLACK
TS-A85GE	4.0	BLACK
TS-A85CE	7.0	BLACK



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max.			
Travel	0.15 ± 0.1mm			
Operating Force	1	130 ± 50gf	2	160 ± 50gf
	3	250 ± 50gf	4	320 ± 50gf
Operating Life (cycles)	100,000			

F	DUST COVER	1	PI FILM	
E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	
A	STEM	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
	DRAWN BY:	DATE	MATL	TITLE
	Jack Lu	08/06/20		SWITCH
	CHECKED BY:	DATE	FINISH	MODLE
	Jacky Chen	08/06/20		TACT SWITCH
	APPROVED BY:	DATE	SCALE	DWG NO.
	Tony Kao	08/06/20	1 : 1	TS-A85xE-x-s126
			SHEET NO.	PART NO.
			1 of 1	TS-A85xE-x-s126
				SIZE
				A4
				VER
				A5



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S	UNITS	MM
	Above 5 ~ 15	± 0.3			
	Above 15 ~ 30	± 0.4			
	Above 30 ~ 50	± 0.5			
	Angle	± 0.3°			