


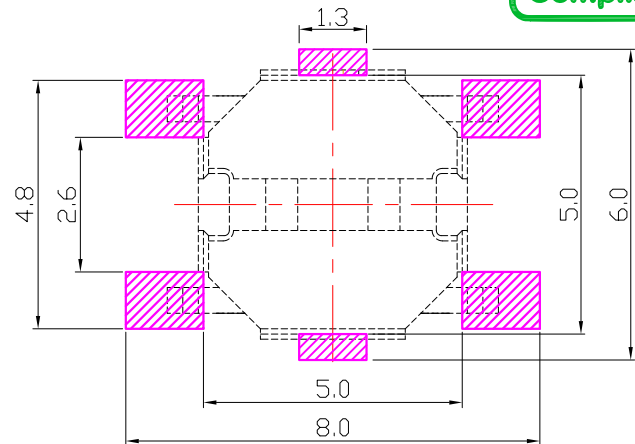

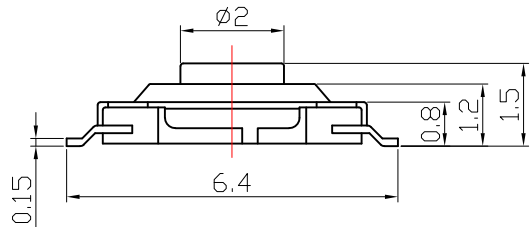


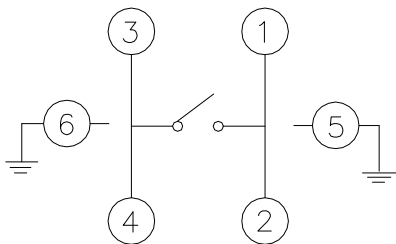

P.C.B MOUNTING HOLE DIMENSIONS

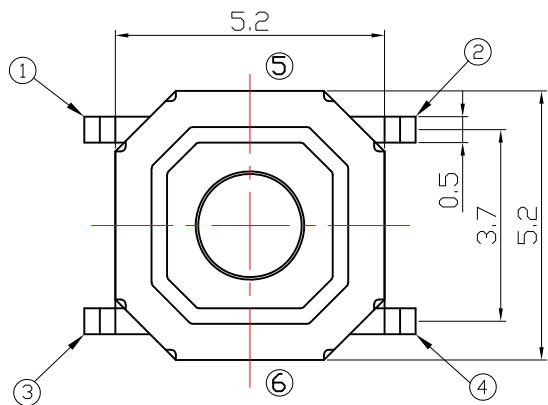

CIRCUIT DIAGRAM

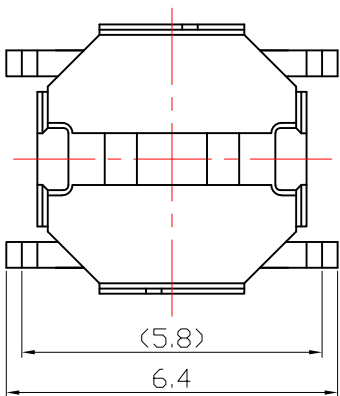

SPECIFICATIONS

Rating	DC 12V 50mA Max.							
Circuit	1P - 1C							
Contact Resistance	100mΩ Max.							
Travel	0.2 ± 0.1mm							
Operating Force	0	100 ± 30 gf	1	130 ± 30 gf	2	160 ± 50 gf	3	250 ± 50 gf
Operating Life(cycles)	100,000 cycles							

F	DUST COVER	1	PI FILM	
E	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	
A	STEM	1	BRASS	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	更新Travel	Jack	070325
3	新增材質表	Jack	080620
2	更新CIRCUIT DIAGRAM	Jack	090613
1	新增OF的選項	Jack	070213
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3	3RD. ANGEL'S		UNITS	MM
-------------------------------------	---	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/03/25	FINISH	MODLE	
CHECKED BY:	DATE	SCALE	DWG NO.	
Jacky Chen	07/03/25	1 : 1	TS-A87G-x-S126	
APPROVED BY:	DATE	SHEET NO.	PART NO.	SIZE
Tony Kao	07/03/25	1 of 1	TS-A87G-x-S126	A4
				VER
				R4